


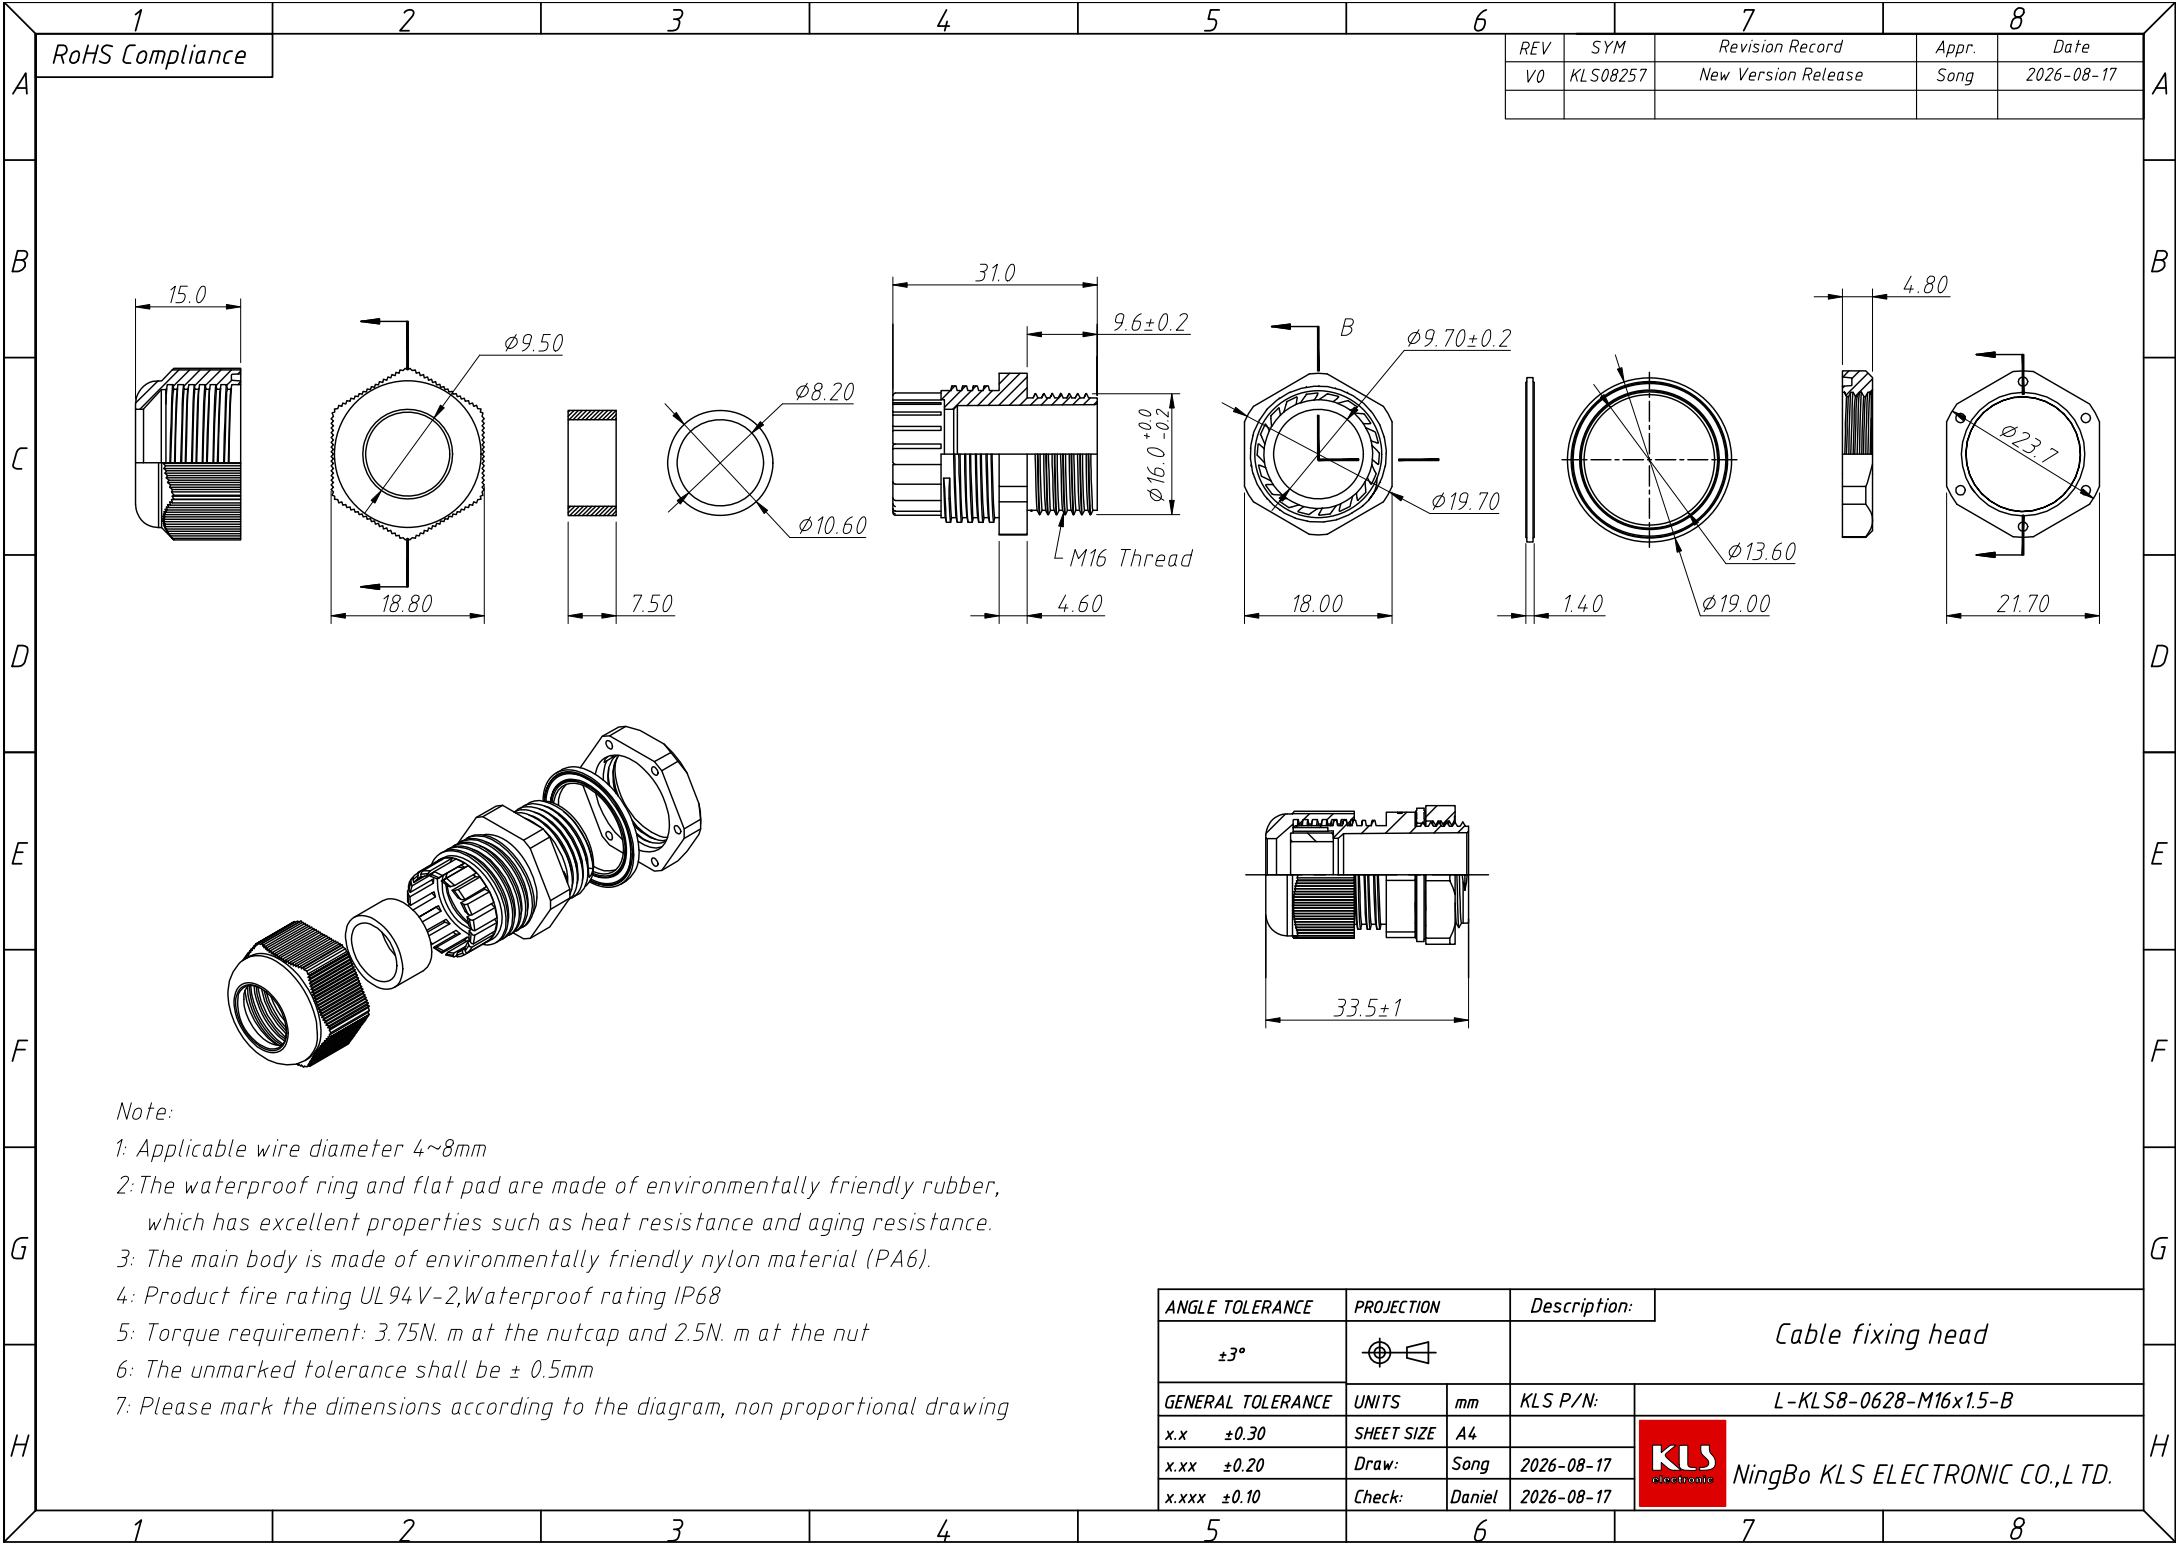

1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS08257	New Version Release		Song	2026-08-17

Note:

1: Applicable wire diameter 4~8mm

2: The waterproof ring and flat pad are made of environmentally friendly rubber, which has excellent properties such as heat resistance and aging resistance.

3: The main body is made of environmentally friendly nylon material (PA6).

4: Product fire rating UL 94V-2, Waterproof rating IP68

5: Torque requirement: 3.75N.m at the nutcap and 2.5N.m at the nut

6: The unmarked tolerance shall be $\pm 0.5\text{mm}$

7: Please mark the dimensions according to the diagram, non proportional drawing

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^\circ$				Cable fixing head	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x		± 0.30		SHEET SIZE	
x.xx		± 0.20		A4	
x.xxx		± 0.10		Draw:	
				Song	
				2026-08-17	
				Check:	
				Daniel	
				2026-08-17	

NingBo KLS ELECTRONIC CO.,LTD.