


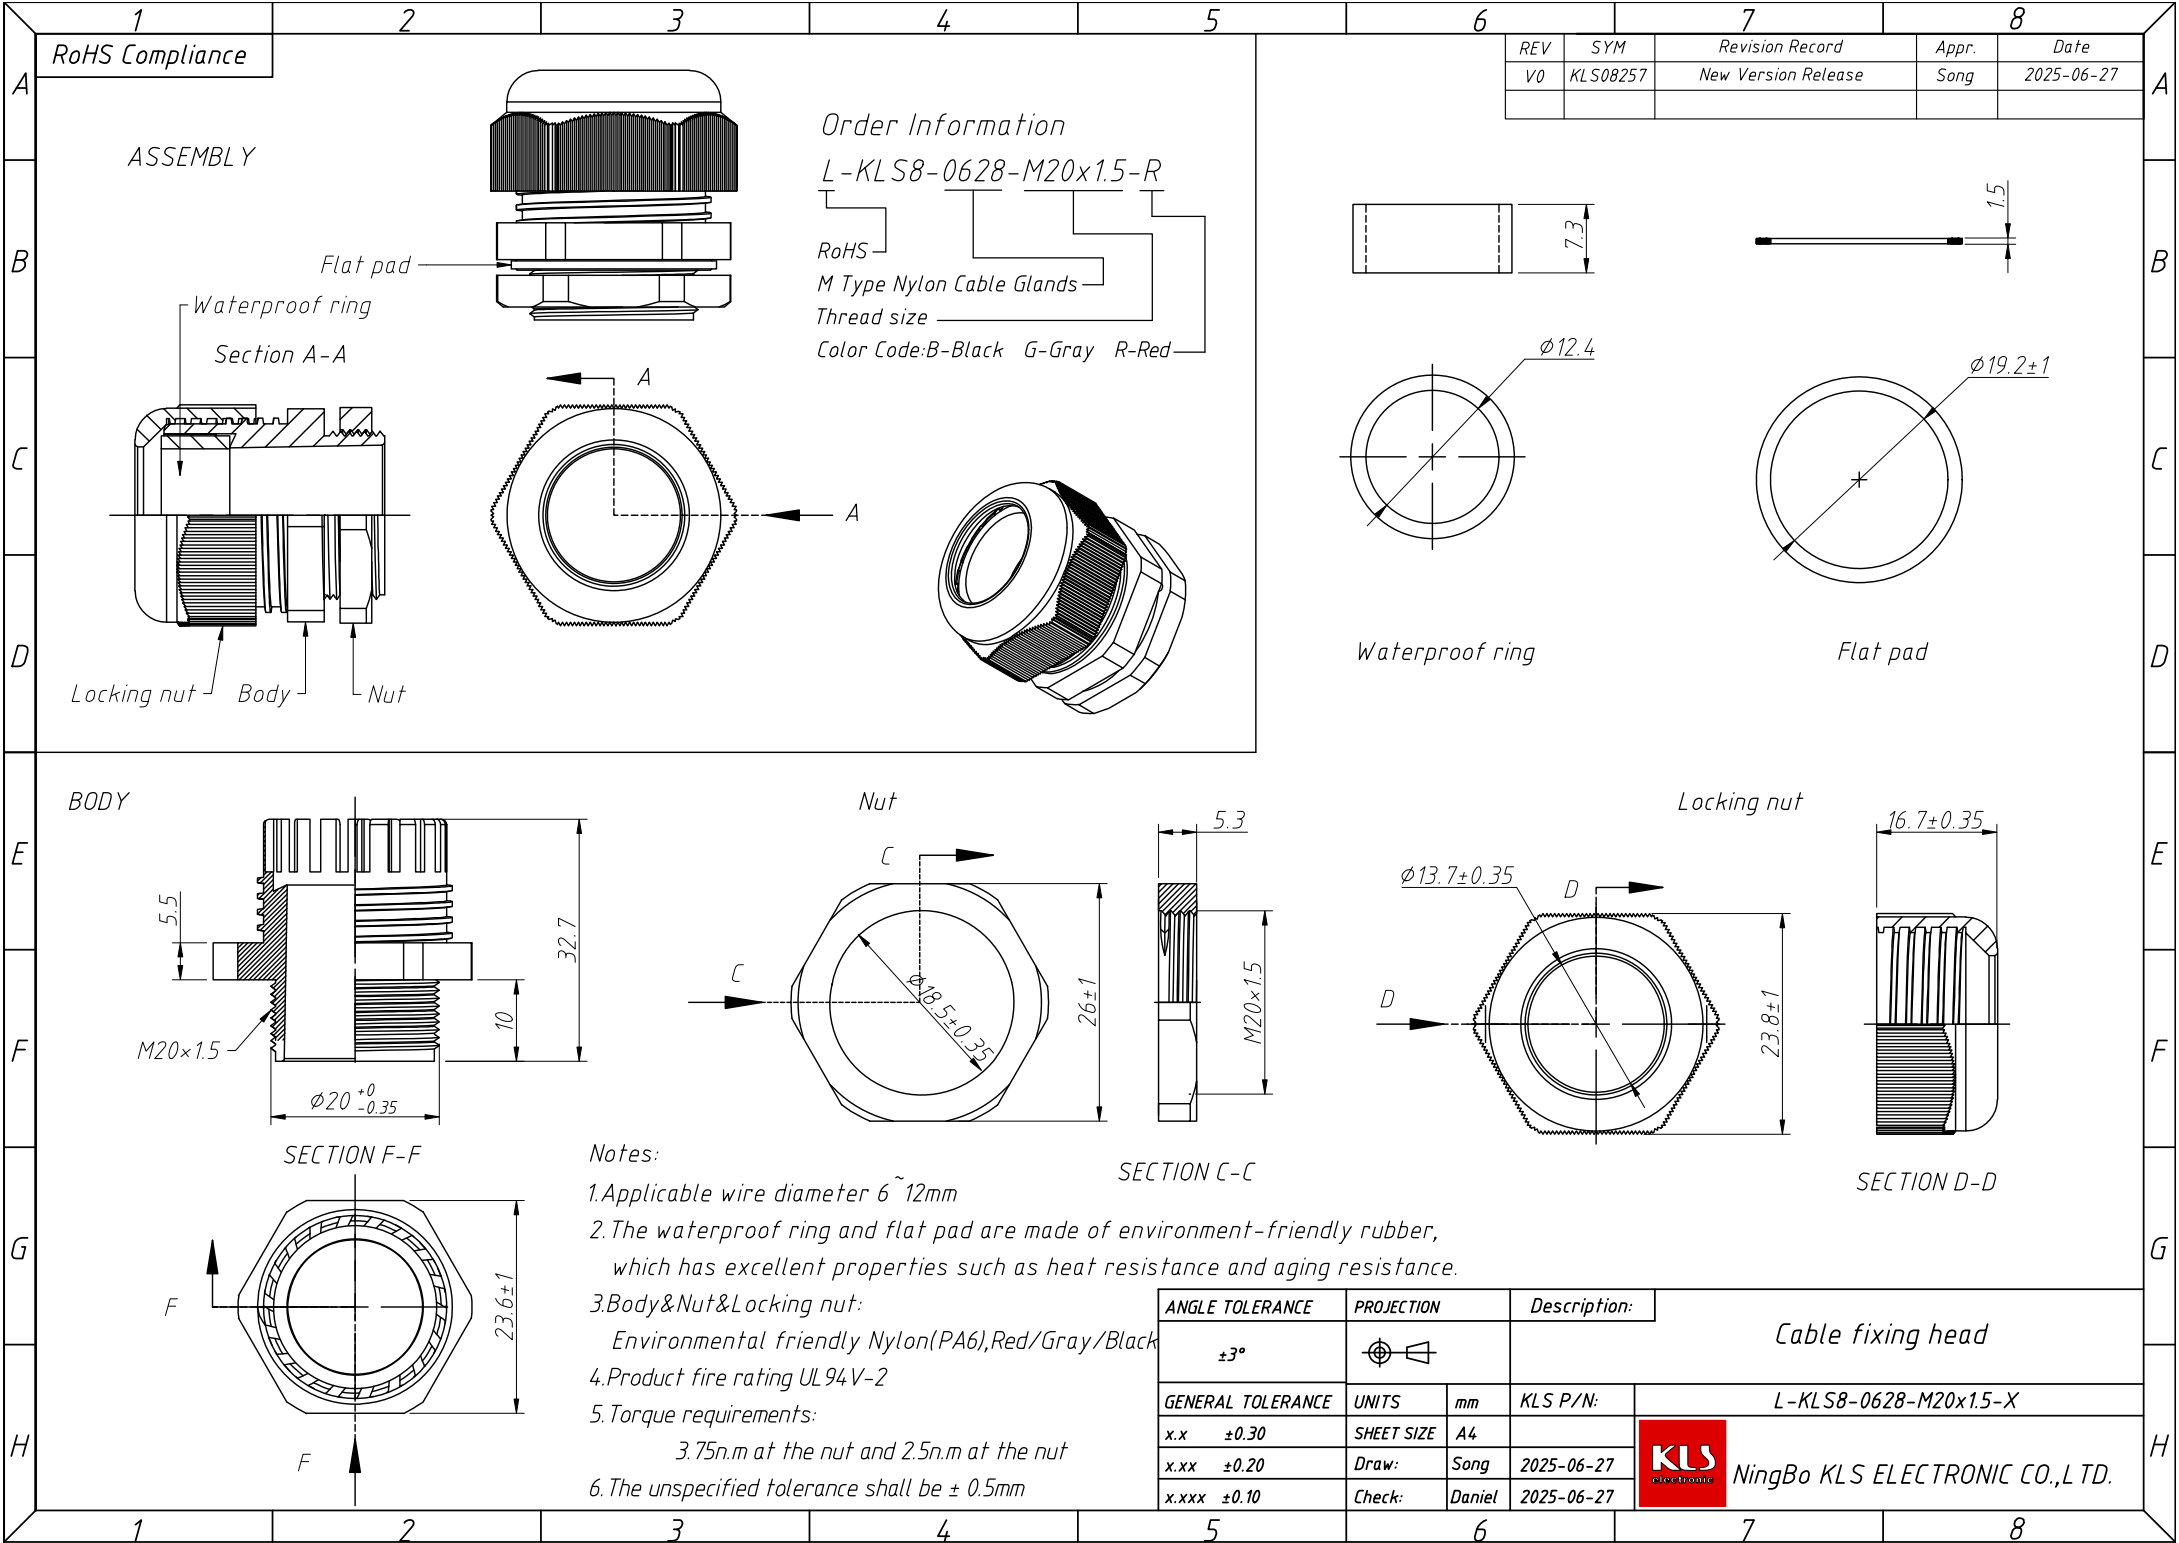

1

2

3

4

5

6

7

8

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS08257	New Version Release	Song	2025-06-27

ASSEMBLY

Order Information
L-KLS8-0628-M20x1.5-R




RoHS
M Type Nylon Cable Glands
Thread size
Color Code: B-Black G-Gray R-Red

Flat pad


Waterproof ring

Section A-A

Locking nut Body Nut



Waterproof ring




Flat pad


BODY

Nut



Locking nut

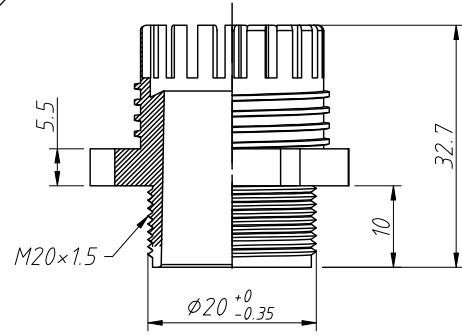


SECTION F-F

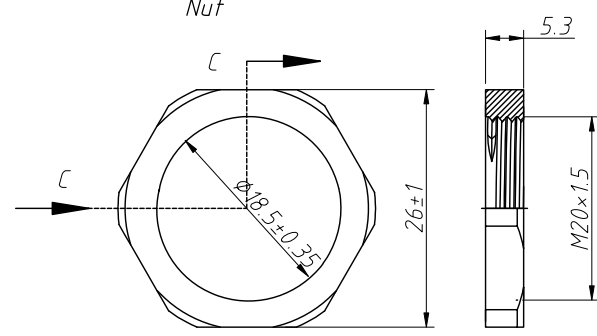

SECTION C-C

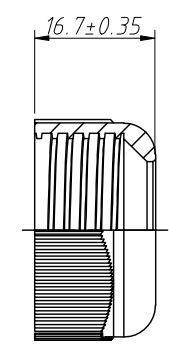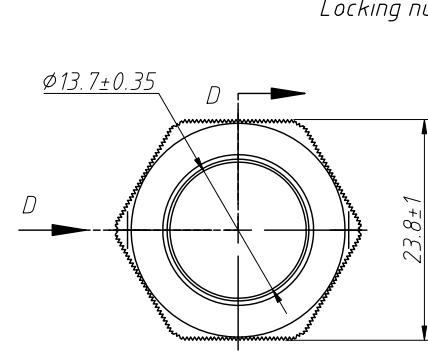

SECTION D-D

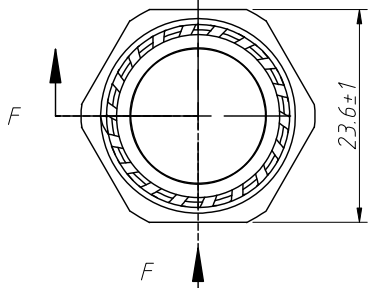

- Notes:
- Applicable wire diameter 6 ~ 12mm
 - The waterproof ring and flat pad are made of environment-friendly rubber, which has excellent properties such as heat resistance and aging resistance.
 - Body&Nut&Locking nut:
Environmental friendly Nylon(PA6),Red/Gray/Black
 - Product fire rating UL94V-2
 - Torque requirements:
3.75n.m at the nut and 2.5n.m at the nut
 - The unspecified tolerance shall be ± 0.5mm

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Cable fixing head
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Song
x.xxx ±0.10	Check:	Daniel
KLS P/N:		L-KLS8-0628-M20x1.5-X
KLS electronic		NingBo KLS ELECTRONIC CO.,LTD.