


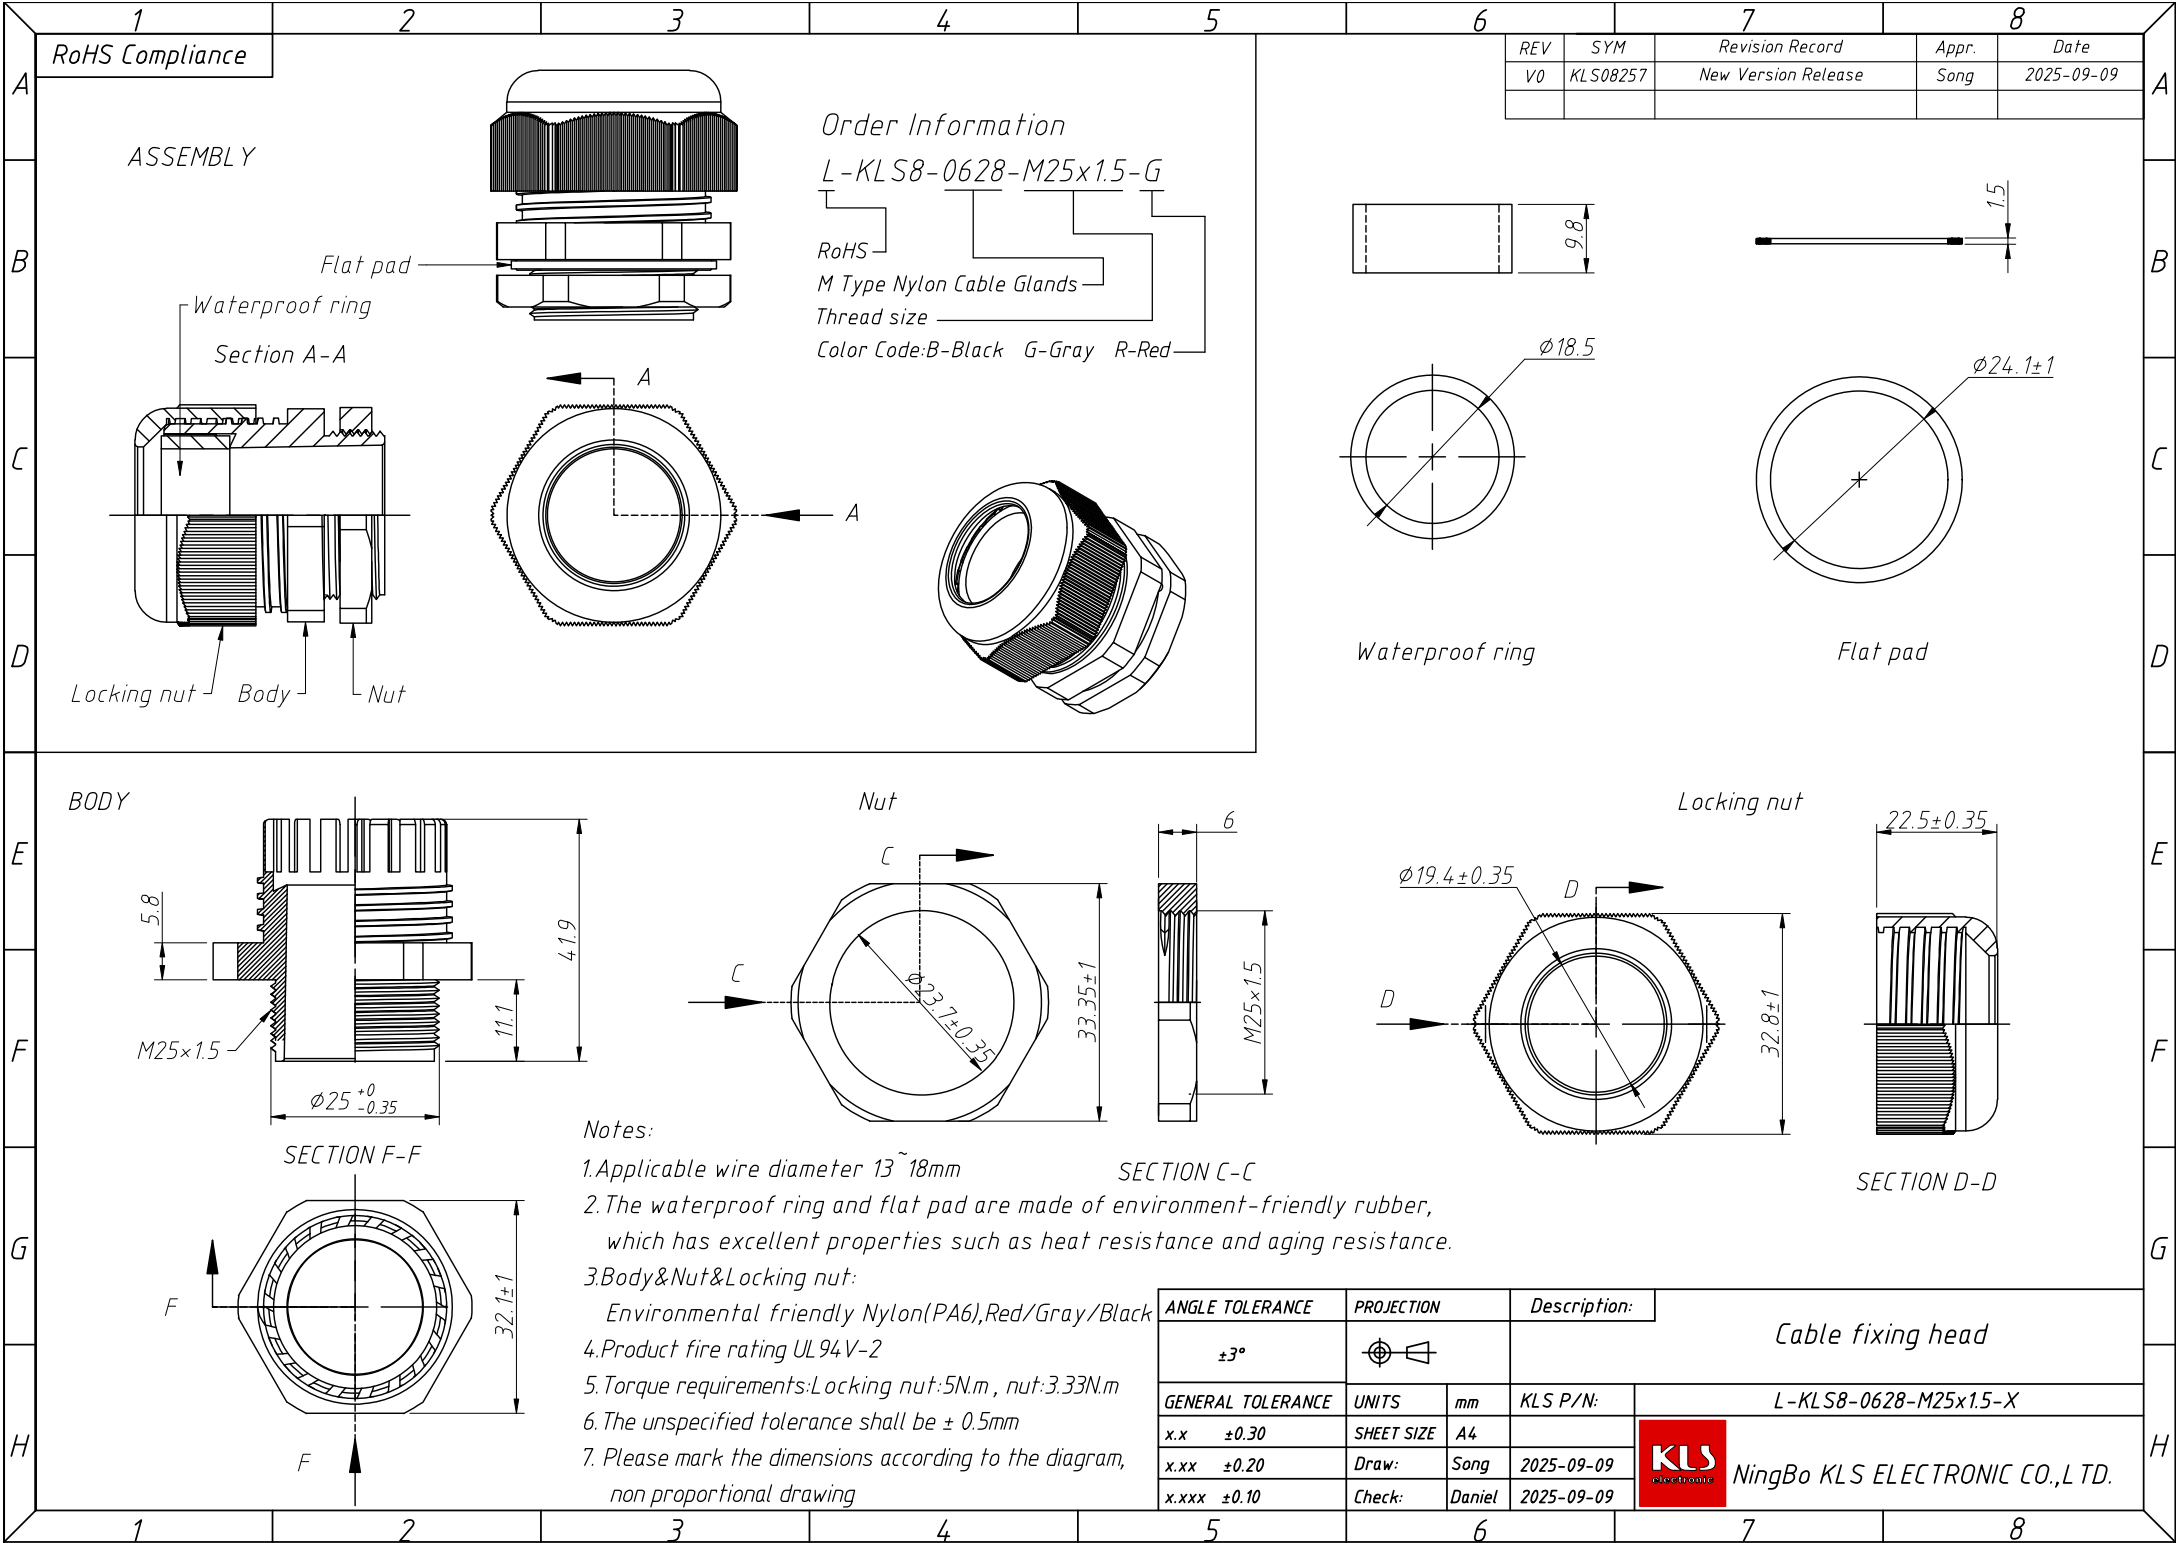

1
RoHS Compliance

2

3

4

5

6

7

8

REV	SYM	Revision Record	Appr.	Date
V0	KLS08257	New Version Release	Song	2025-09-09

ASSEMBLY




Order Information
L-KLS8-0628-M25x1.5-G
RoHS
M Type Nylon Cable Glands
Thread size
Color Code:B-Black G-Gray R-Red

Flat pad

Waterproof ring

Section A-A

Locking nut Body Nut







Waterproof ring

Flat pad

BODY

Nut


Locking nut

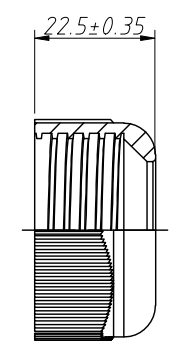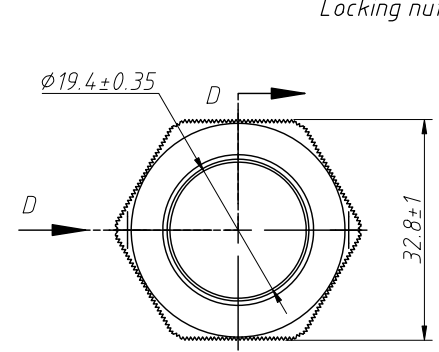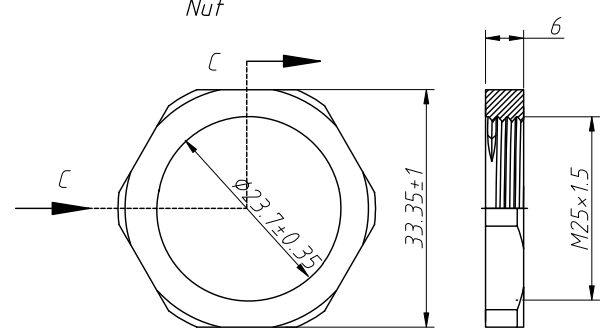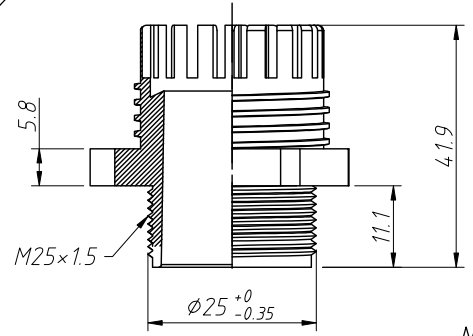

SECTION F-F

SECTION C-C

SECTION D-D

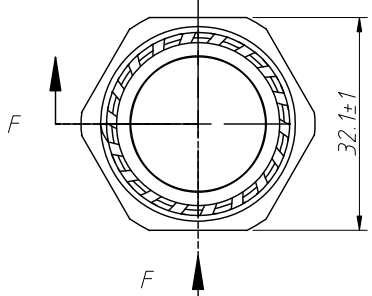

Notes:

- 1.Applicable wire diameter 13~18mm
- 2.The waterproof ring and flat pad are made of environment-friendly rubber, which has excellent properties such as heat resistance and aging resistance.
- 3.Body&Nut&Locking nut:
Environmental friendly Nylon(PA6),Red/Gray/Black
- 4.Product fire rating UL 94V-2
- 5.Torque requirements:Locking nut:5N.m, nut:3.33N.m
- 6.The unspecified tolerance shall be ± 0.5mm
7. Please mark the dimensions according to the diagram, non proportional drawing

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Cable fixing head
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Song
x.xxx ±0.10	Check:	Daniel
KLS P/N:		L-KLS8-0628-M25x1.5-X
KLS electronic		NingBo KLS ELECTRONIC CO.,LTD.