

CHEAPE TECHNOLOGY INTERNATIONAL Ltd

1. Preface

The purpose of this product specification is to provide technical information for the rechargeable Lithium-ion button battery LiR2477.

2. Description and Model

2.1 Description	Rechargeable Lithium-ion button battery
2.2 Model	LiR2477

3. Specification

3.1 Capacity	Nominal	150mAh
	Typical	180mAh
3.2 Charging Voltage		4.20V
3.3 Nominal Voltage		3.7V at 0.2C mA
3.4 Standard Charging Method		Constant current:75mA Constant voltage 4.20V total 5
3.5 Cut-off Discharge Voltage		3.00V
3.6 Max.Discharge Current		300mA
3.7 Max.Charge Current		150mA
3.8 Cycle Life		>500 cycles at 0.2C mA discharge
3.9 Ambient Temperature		
	for Standard Charge	0°C ~ 45°C
	for Discharge	-20°C ~ 60°C
3.10 Storage		
	for within the temperature	-20°C ~ 60°C
	for within the humidity	≤75%
3.11 Energy Density		
	Wh/L	~200
	Wh/Kg	~90
3.12 Weight of Bare Cell		~7g
3.13 Charge State Internal Impedance		<300m Ω

4. Appearance

Appearance shall be free from any remarkable scratch, flaws, rust, discoloration or electrolyte leakage (visible or by smell)

5. Standard Test condition

5.1 Environment Conditions

Unless otherwise specified, all tests stated in this Product Specification are conducted within the temperature 15~25°C and the humidity 45~85%RH.

CHEAPE TECHNOLOGY INTERNATIONAL Ltd

5.2 Test Equipment

(1) Impedance meter

The impedance meter with AC 1kHz should be used



6. Test Procedure and Its Standard

Item	Measuring Procedure	Standard
6.1 Appearance	Visual	No Defect and Leak
6.2 Dimension	Caliper	As item 8
6.3 Weight	Scale	As item 3.12
6.4 Maximum Charge Current	CCCV(Constant Current Constant Voltage)	150mA
6.5 Full charge	CCCV	CC-0.2CmA CV- 4.2V total 8h
6.6 Open Circuit Voltage	Within 1hr after full charge,measure Open circuit voltage	>4.15V
6.7 Internal Impedance	Measure the battery with 1kHz AC	<300m Ω
6.8 Discharge Capacity	Within 1hr after full charge,discharge until final discharge,at 0.2C mA and measure the capacity	>150mAh
6.9 Maximum Discharge Current	Until final discharge voltage	300 mA
6.10 Charge/Discharge Cycle Life	Charge:CCCV,CC- 0.2CmA,CV- 4.2V total8h Discharge:0.2CmA to 3.00V,This charge/discharge shall be repeated 500 times	Discharge capacity should be >70% of item 6.8
6.11 Leakage Proof	After full charging,the battery shall be stored at 40 \pm 2 $^{\circ}$ C and humidity 80 \pm 5%for 21 days	No leakage should be observed by visual inspection
6.12 Temperature Characteristics	1)After full charge at 20 \pm 5 $^{\circ}$ C ,stand at -20 \pm 2 $^{\circ}$ C for 18h,then discharge at 0.2C mA and measure the capacity 2)After full charge at 20 \pm 5 $^{\circ}$ C ,stand at 55 \pm 2 $^{\circ}$ C for 2hrs ,then discharge at 1C mA and measure the capacity	Discharge capacity should be>60% of item 6.8 and no abnormality on its appearance and stucture
6.13 Charge Retension	After full charging,stand at 20 \pm 5 $^{\circ}$ C for 28 days,measure the discharge capacity according to item 6.8	Discharge capacity should be>85% of item 6.8

CHEAPE TECHNOLOGY INTERNATIONAL Ltd

7.1 Charge/Discharge Characteristics
 Charge:CC/CV 4.2V, 75mA(0.5C),
 total 5h
 Discharge:75mA(0.5C) Cut-off at 3.00V
 Temperature:25°C

7.3 Temperature Characteristics
 Charge: CC/CV 4.2V 0.5CA,total 5h
 Discharge:0.5CA,Cut-off at 3.00V

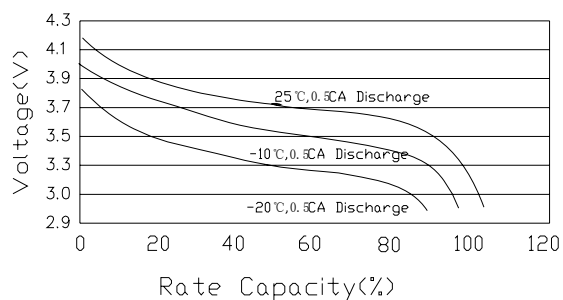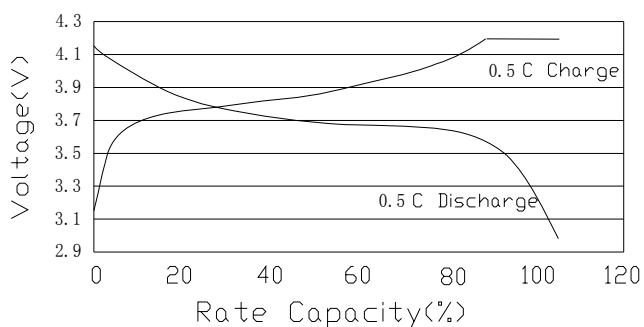

7.2 Charge/Discharge Cycle Life
 Charge:CC/CV 4.2V, 0.2CA,
 total 8h
 Discharge:0.2CA,Cut-off at 3.00V
 Temperature:25°C

8. Dimension(Bare cell) mm

