




Board To Board Male 0.6mm H=2.1mm

SPECIFICATION

Current Rate:0.4 AMP
Insulation Resistance:100MΩ Min.
Contact Resistance:45mΩ Max.
Dielectric Voltage:300V AC for one minute
Operation Temperature:-25°C to +85°C




MATERIAL

Insulator:Polyester,UL 94V-0
Standard:Nylon 6T
Contact Pin:Phosphor Bronze
Contact Plating:Gold Plated

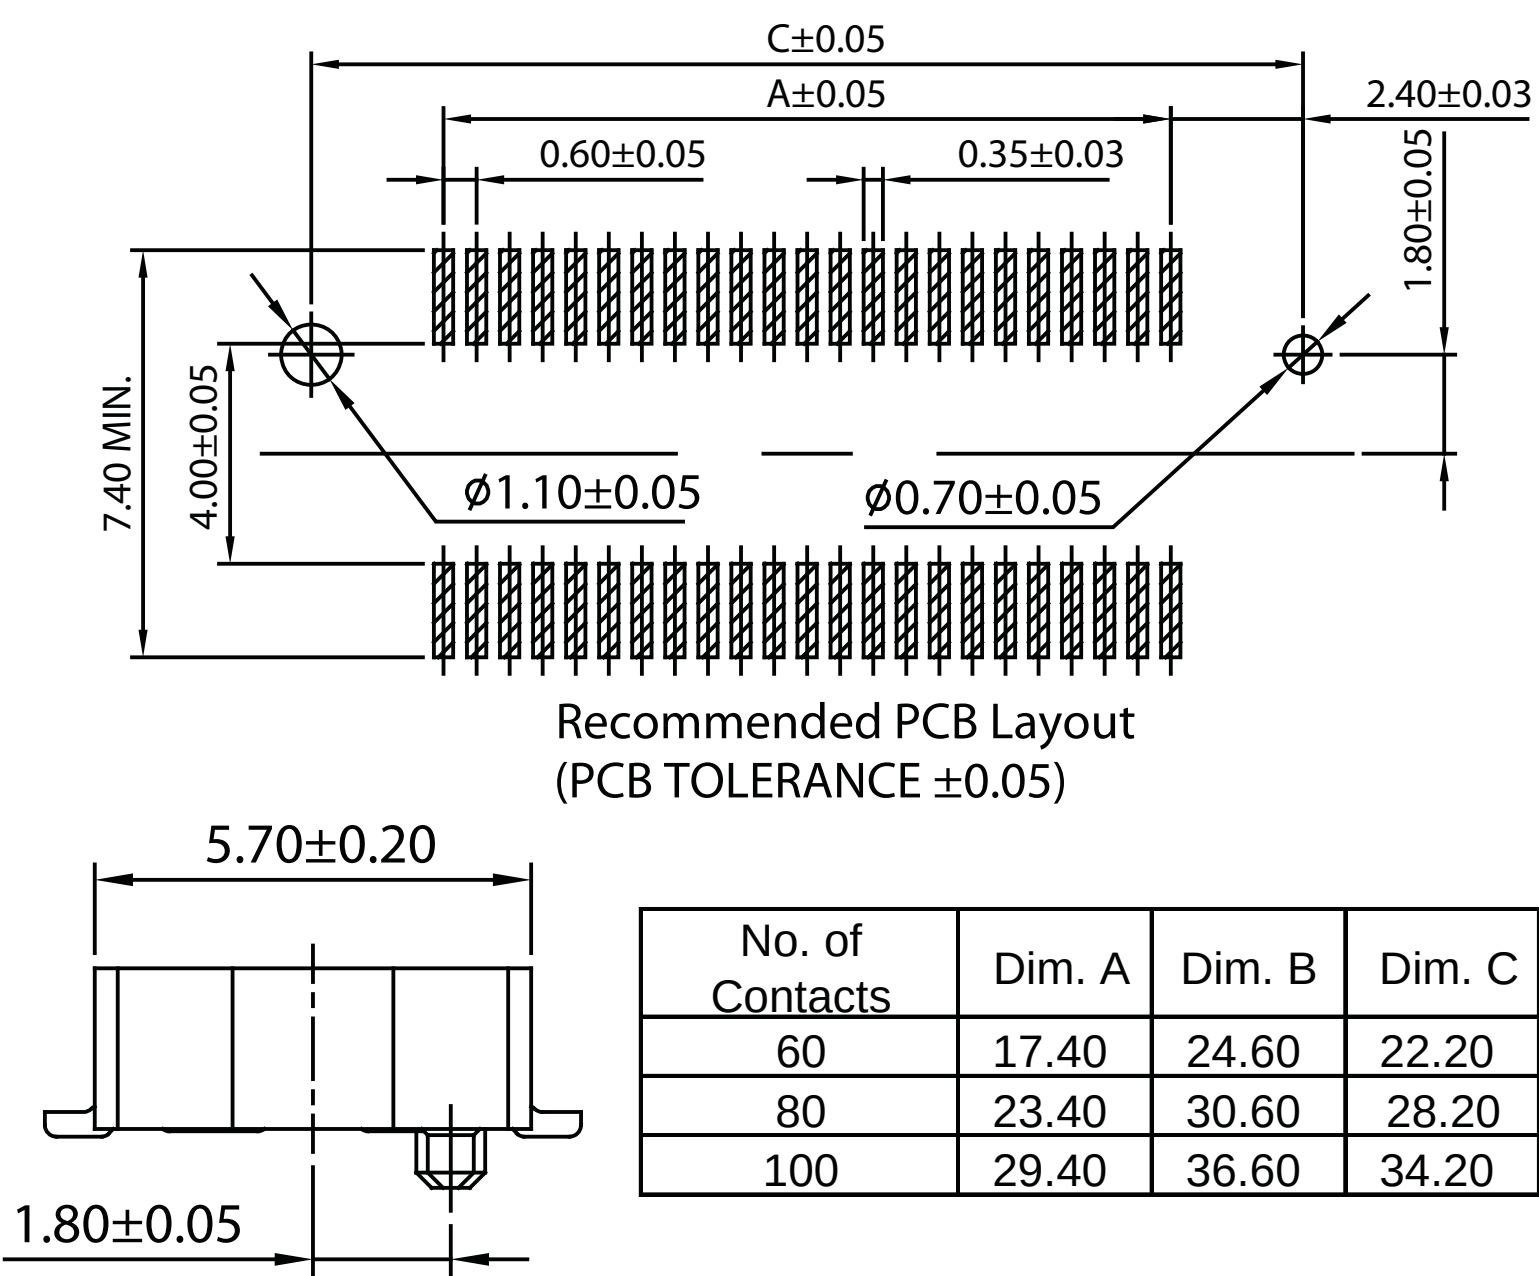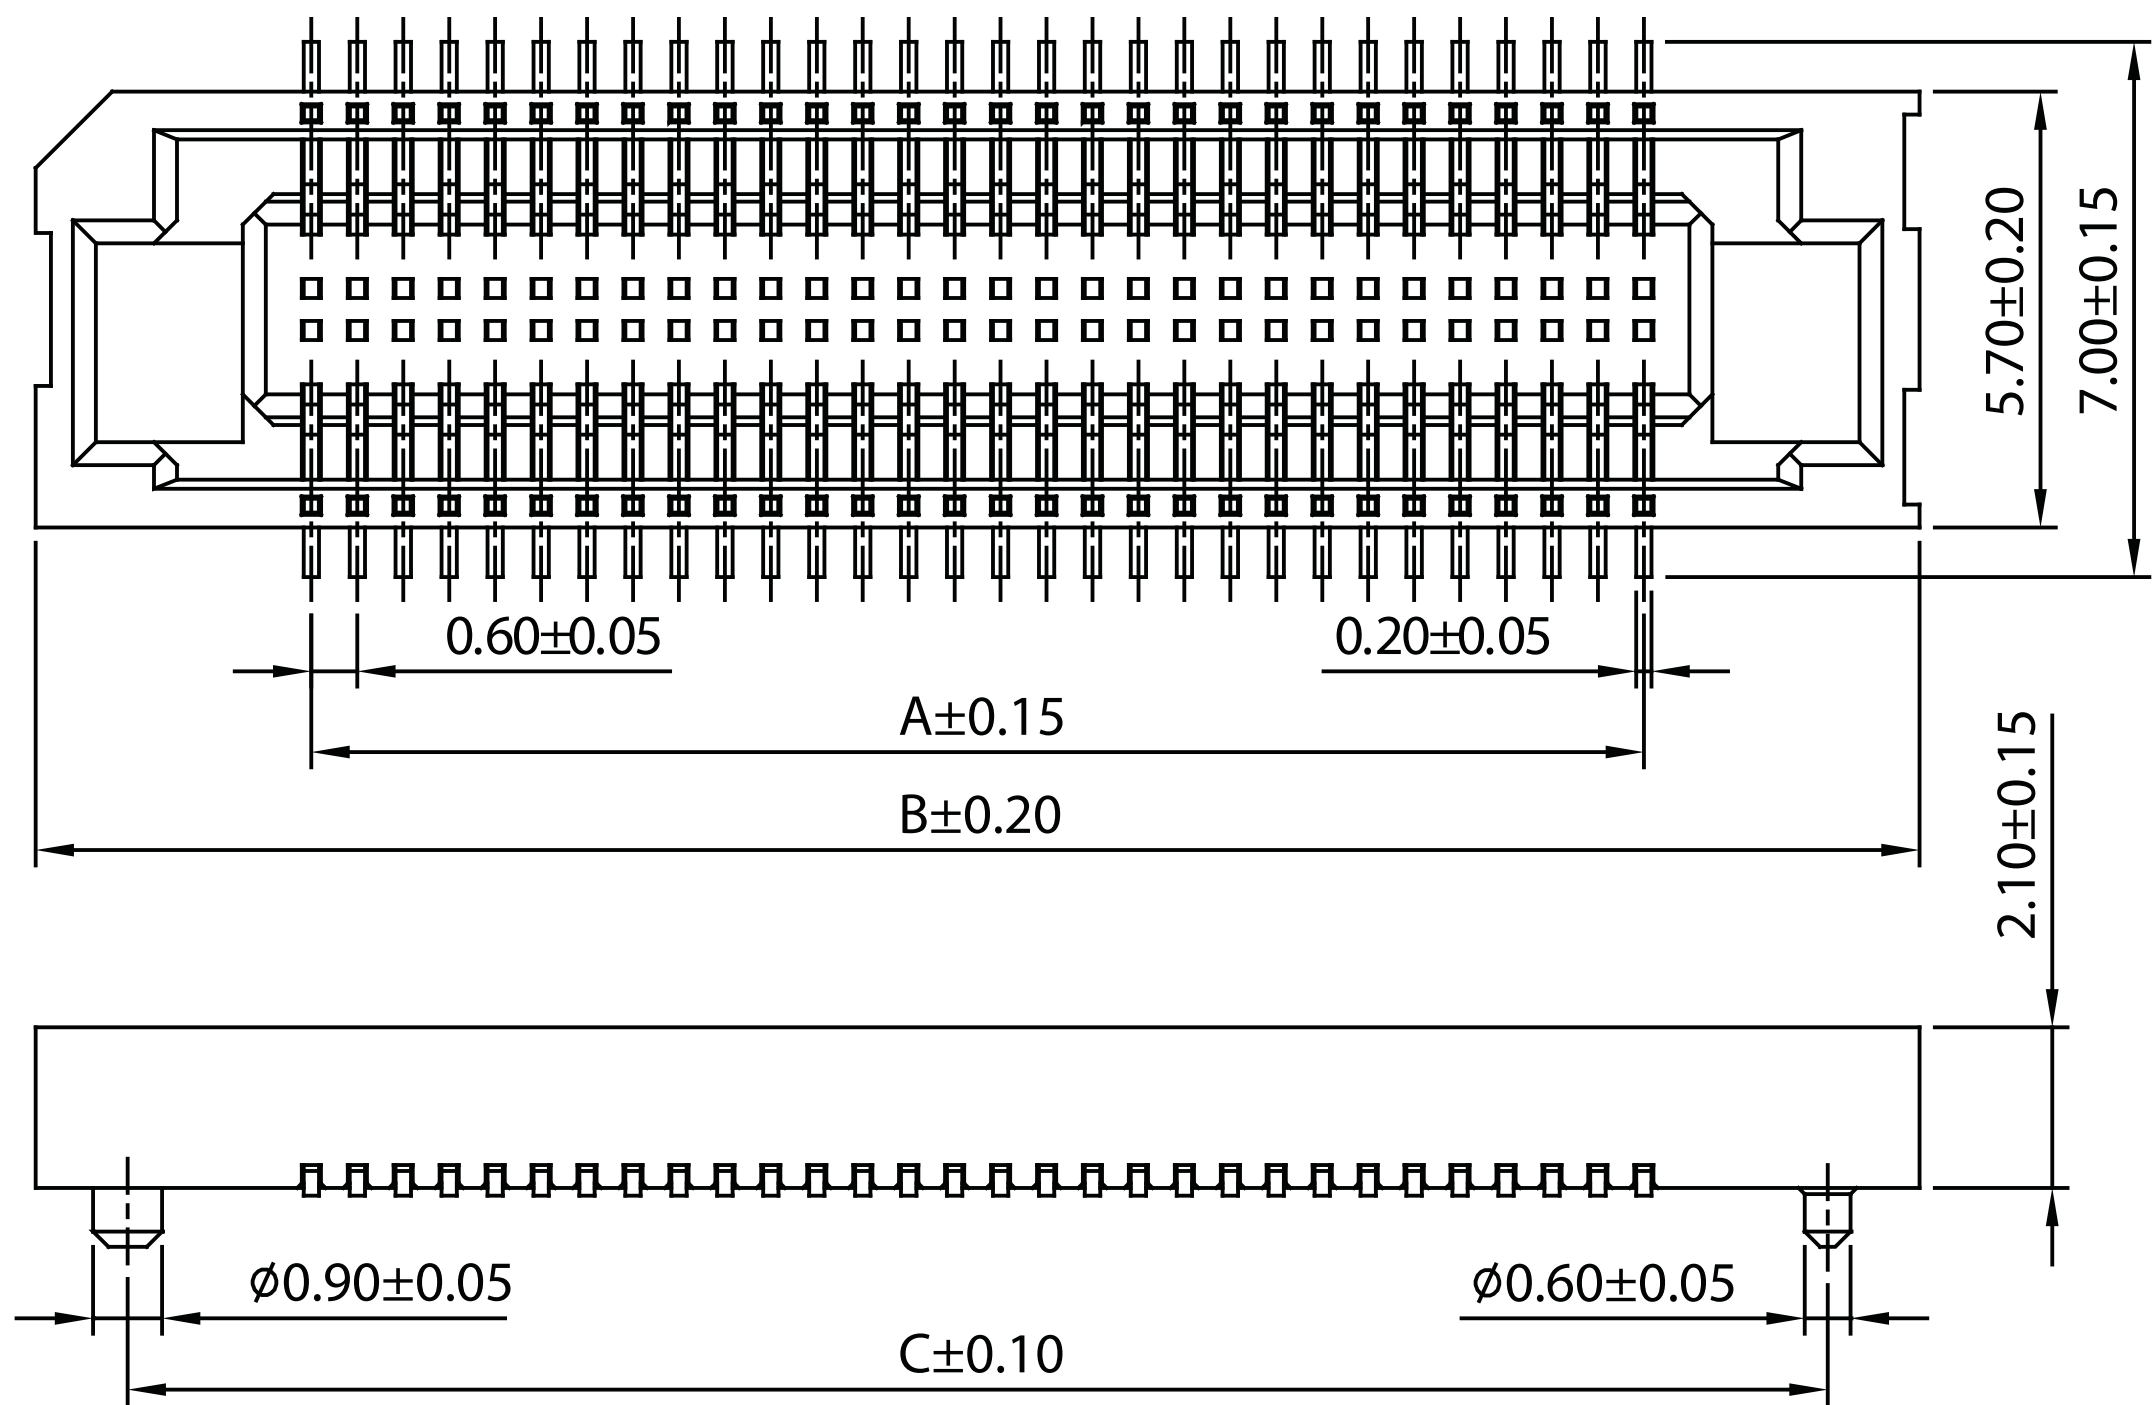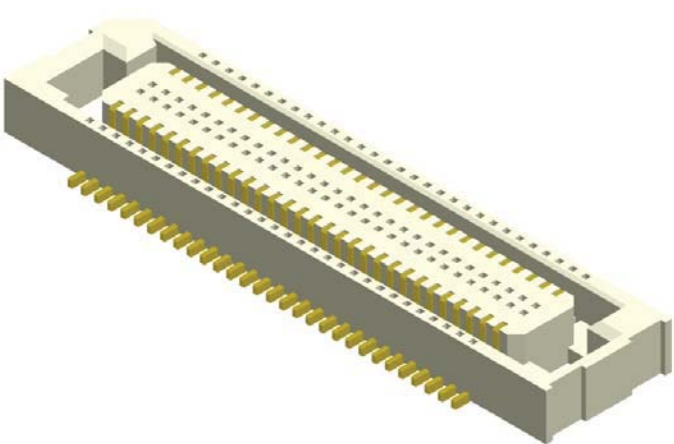

Part No.:BTB06M21-XX-U

Board To Board Female 0.6mm H=2.37mm

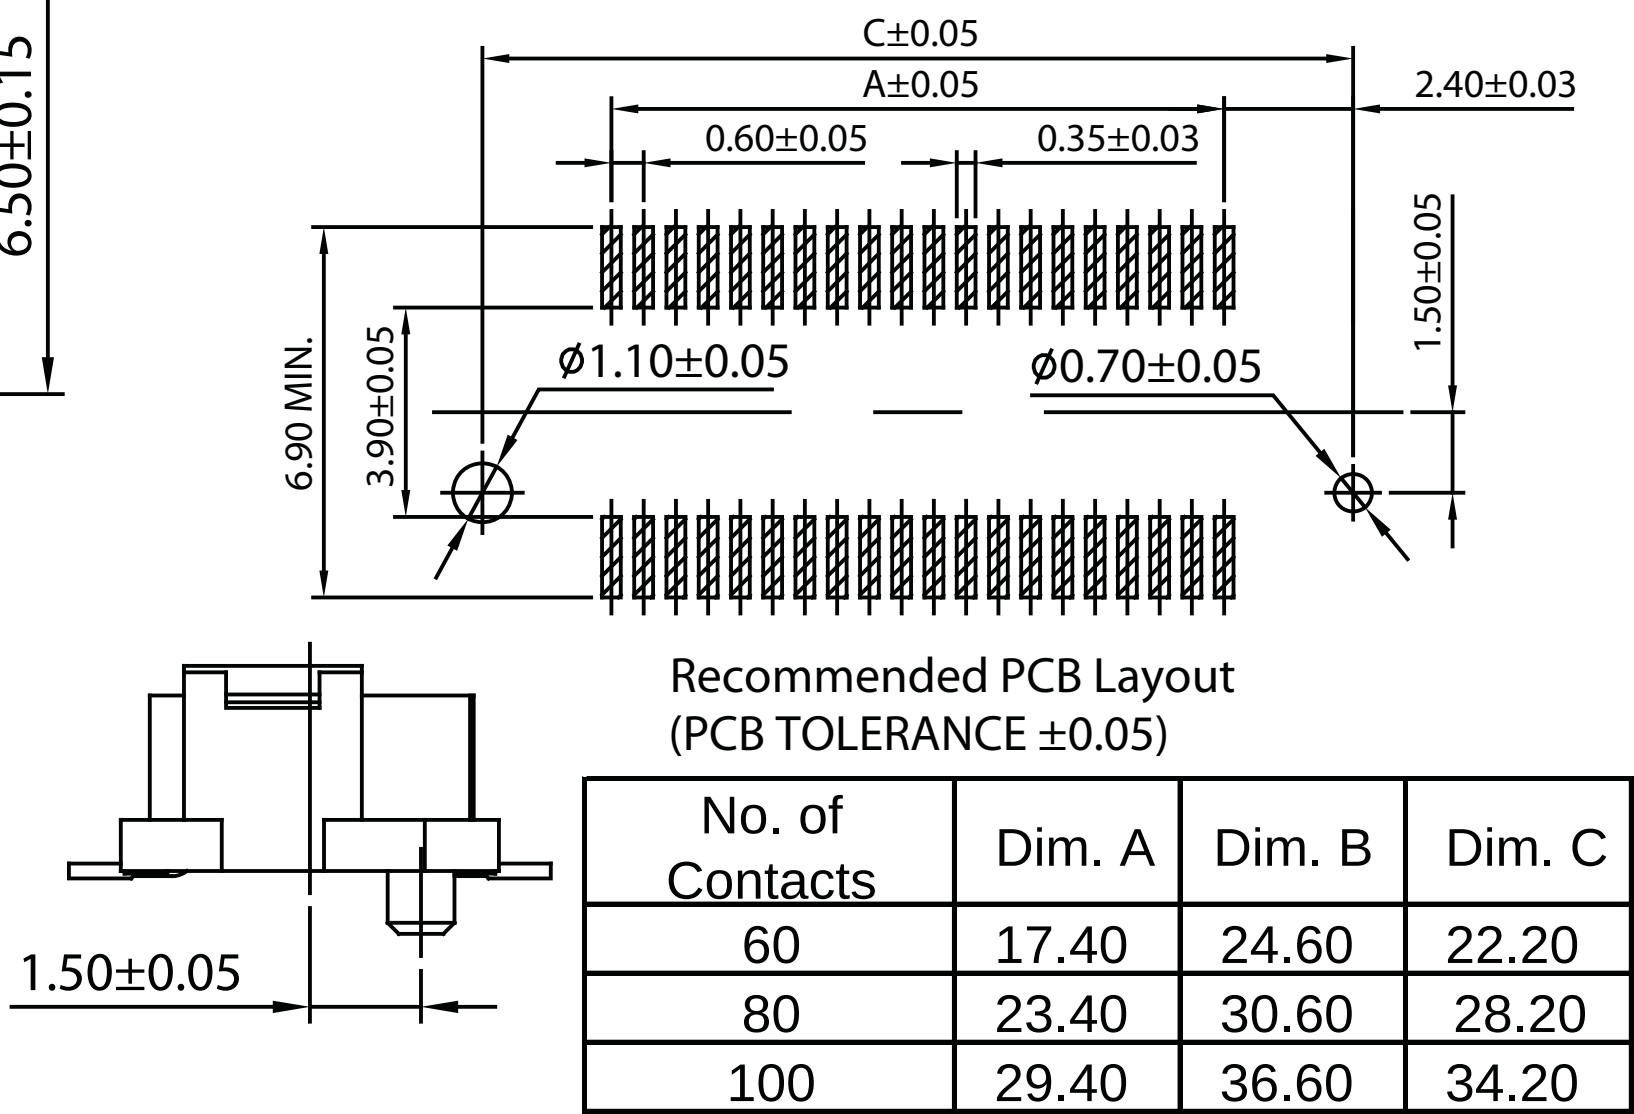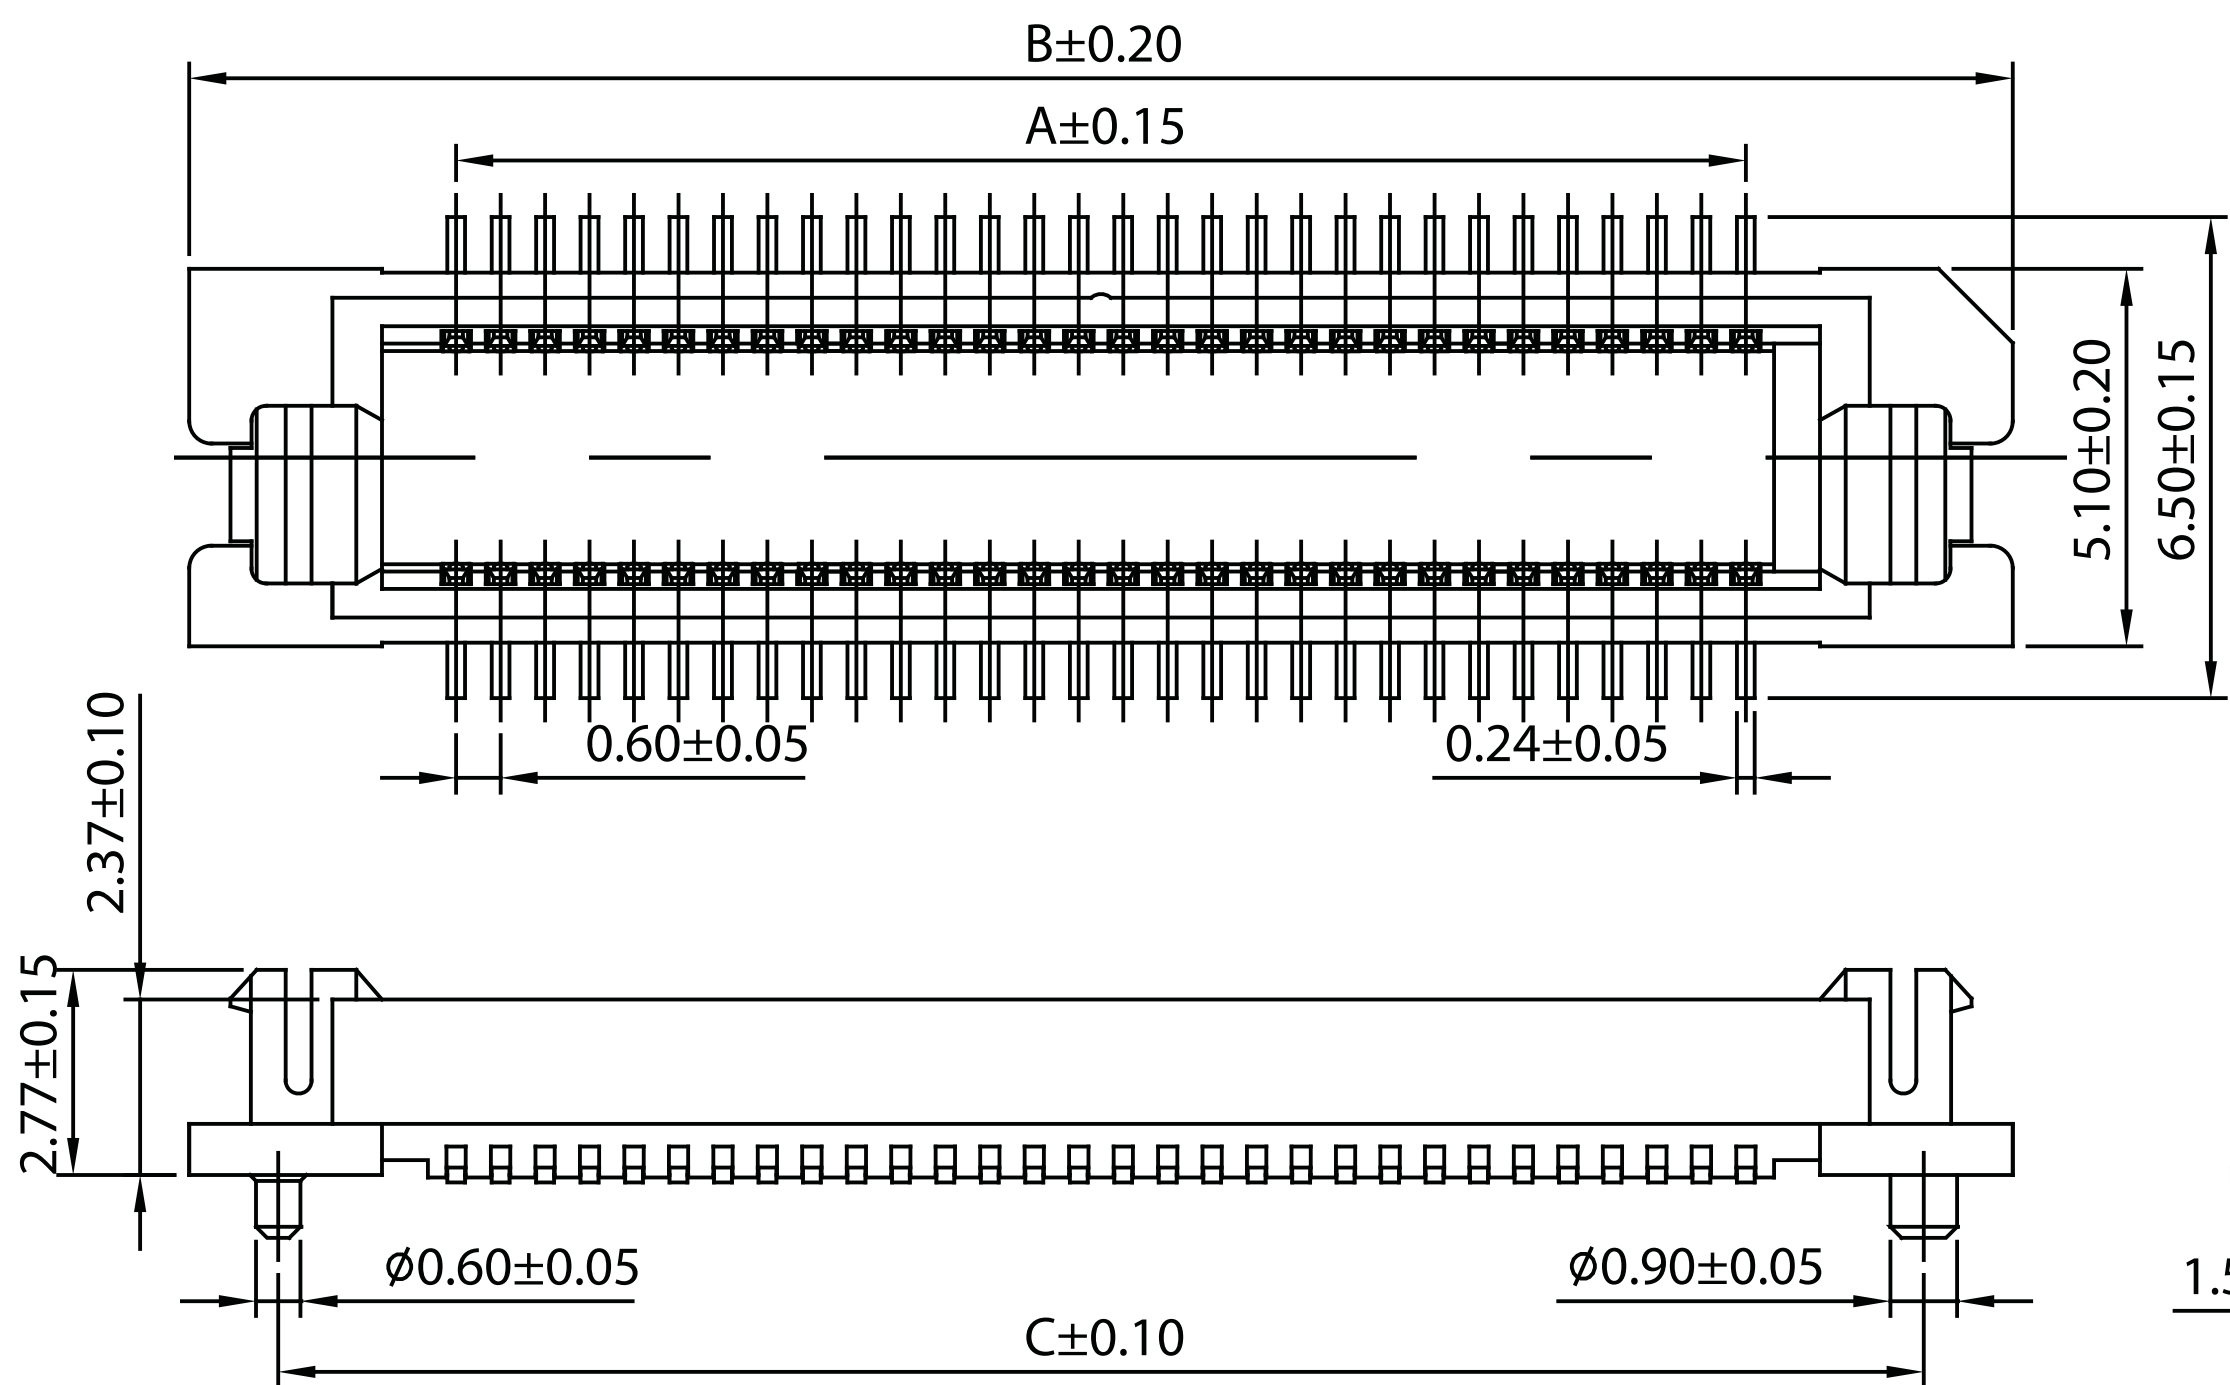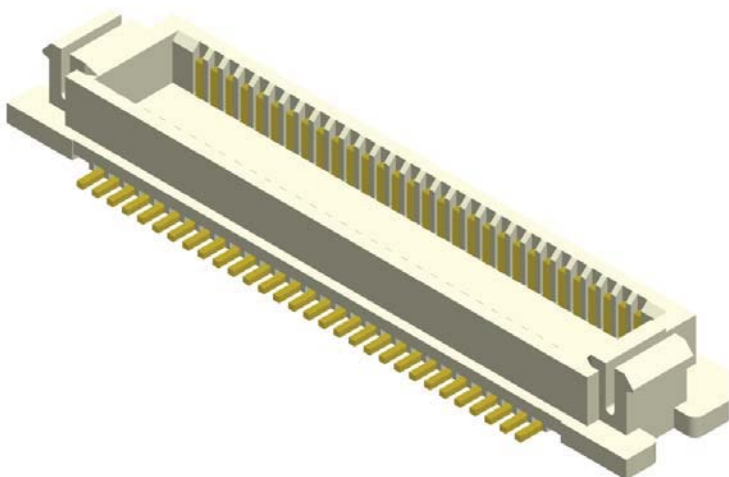

Part No.:BTB06F24-XX-U

ORDER INFORMATION

