


SIM CARD PINOUT		
PIN NO.	NAME	DESCRIPTION
C1	VCC	+5V OR 3.3V DC
C2	RST	CARD RESET (POTIONAL)
C3	CLK	CARD CLOCK
C4	AS	APPLICATION SPECIFIC
C5	GND	GROUND
C6	VPP	+21V DC
C7	I/O	IN/OUT
C8	AS	APPLICATION SPECIFIC

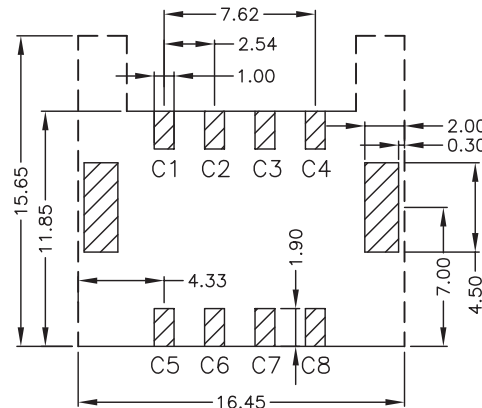

RECOMMEND P.C.B. LAYOUT  
TOLERANCE  $\pm 0.05$   
TOP VIEW

## MATERIALS

1. HOUSING : HI.-TEMP.PLASTIC(UL 94V-0).BLACK
2. TERMINAL : COPPER ALLOY.(t=0.15mm)  
GOLD PLATED OVER NICKEL
3. FORK : COPPER ALLOY. (t=0.20mm)  
TIN PLATED OVER NICKEL

## SPECIFICATION

1. CURRENT RATING : 1.0 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :  
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M $\Omega$  MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m $\Omega$  MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

115C-B C 0 0-R  
1 2 3

1.Type  
B:8Pin

2.Contact Plating  
C:Gold Flash

3.RoHS

UNLESS OTHERWISE  
SPECIFIED TOLERANCE

ANG.  $\pm 5$   
0.  $\pm 0.3$   
.0  $\pm 0.25$   
.00  $\pm 0.20$

SCALE: AS SHOWN UNIT: mm

DRAWN 2009/03/24

CHECKED / /

APPROVED / /

DRAWN NAME:

SIM Card Socket  
w/Card holder

PRODUCT NO. 115C-BC00-R

FILE NAME: 115C-BC00-R\_B\_1

REV.

DESCRIPTION

DATE



SIZE

A4

REV.

1

2

3

4

5

6

7

8

9

10