


Material: Phosphor bronze, Tin-Plated
 Contact: PBT+G.F.
 Insulator: PBT+G.F.
 Specification
 Current Rating : 1A AC,DC
 Insulation Resistance : 1,000M Ω Min.
 Withstanding Voltage : 500V AC/Min.
 Temperature Range : -55°C~+105°C

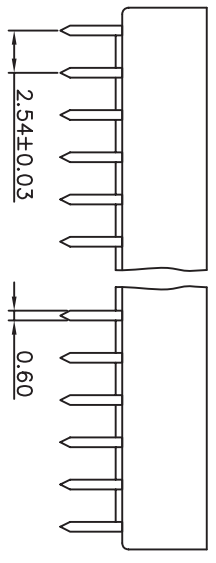

IC SOCKET	A ^{+0.00} _{-0.05}	B+0.10
SCS-6	7.62	5.08
SCS-8	10.16	7.62
SCS-14	17.78	15.24
SCS-16	20.32	17.78
SCS-18	22.86	20.32
SCS-20	25.40	22.86
SCS-22	27.94	25.40
SCS-21	30.48	27.94
SCS-28	35.56	33.02
SCS-32	40.64	38.10

Rev	Description/Date	Drawn By: Storm.li	Customer:	Part No.:	Title:	Third angle projection	Units: mm
△		Checked By: Simmon		SCS-XX			X.X ±0.25 X.XX ±0.1 X.XXX ±0.08
△		Approved By: Tony		2.54 mm IC Socket 7.62mm			
SGS Report No.:							