

Specifications

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C to +85°C

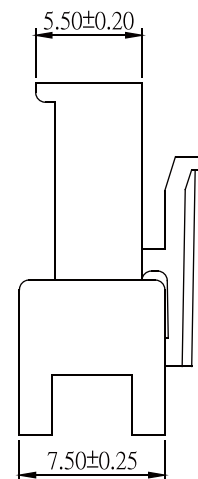
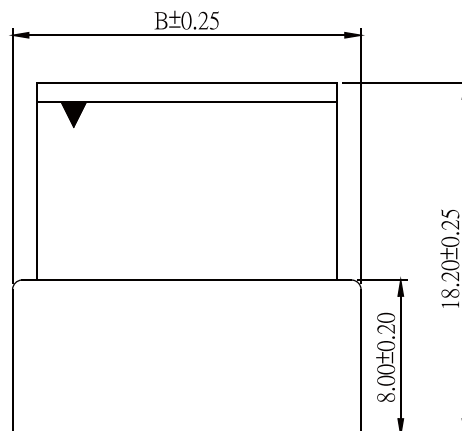
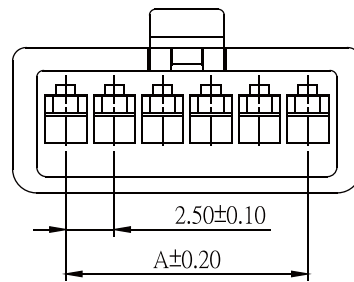
Contact Resistance: 10mΩ Max

Insulation Resistance: 500M Ω Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0

Part No.	Dimensions	
	A	B
2507H-M02B-L	2.50	8.00
2507H-M03B-L	5.00	10.50
2507H-M04B-L	7.50	13.00
2507H-M05B-L	10.00	15.50
2507H-M06B-L	12.50	18.00
2507H-M07B-L	15.00	20.50
2507H-M08B-L	17.50	23.00
2507H-M09B-L	20.00	25.50
2507H-M10B-L	22.50	28.00
2507H-M11B-L	25.00	30.50
2507H-M12B-L	27.50	33.00

**Part No.:2507H-MXXB-L**