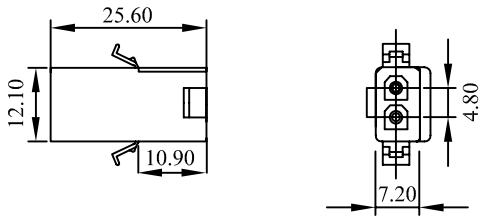

WW158A-F02E(5A/250V)

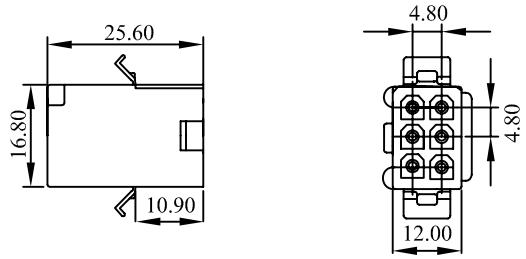

WW158A-F06E(5A/250V)

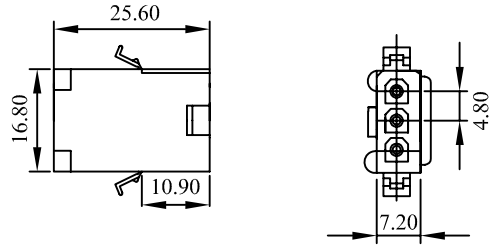

WW158A-F03E(5A/250V)

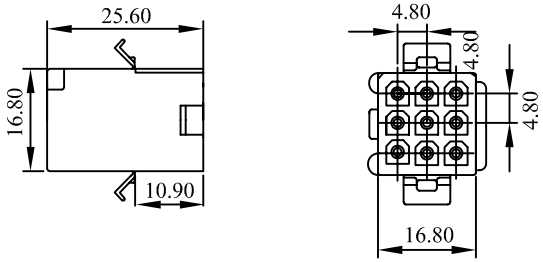

WW158A-F09E(5A/250V)

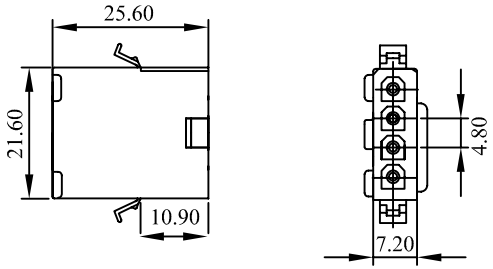

WW158A-F04E(5A/250V)

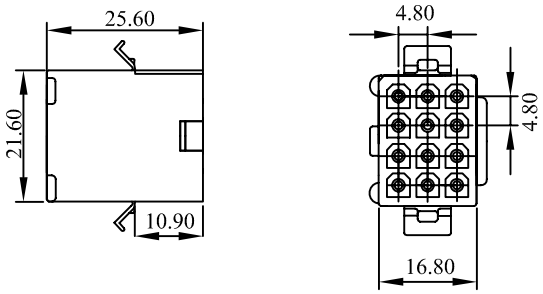

WW158A-F12E(5A/250V)

Material: Nylon 66 UL94V-2
Current rating:6A AC,DC Max
Voltage Rating:300V AC,DC Max
Contact resistance:15mΩ Max
Insulation resistance:1000MΩ Min
Withstanding voltage :1500V AC/Minute
Temperature range:-25°C to +85°C
Applicable panel thickness: 2 mm max

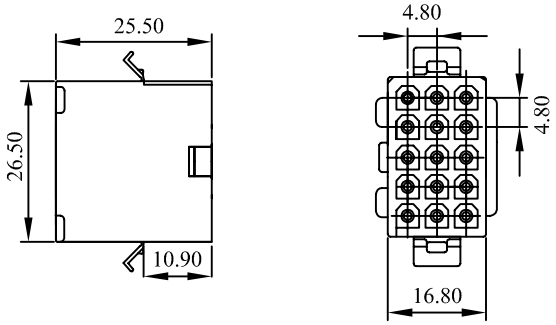

WW158A-F15E(5A/250V)

Rev	Description/Date	Drawn By: Storm.li	Customer:		Third angle projection	Units: mm
△		Checked By:Simmon	Part No.:	WW158A-F(E) Series	General Dimension Tolerance	X.X ±0.25 X.XX ±0.1 X.XXX ±0.08
△		Approved By: Tony	Title:	Housing		
SGS Report No.: KA/2004/80788/A-2						