

WW158B-M01E (5A/250V)

WW158B-M04E (5A/250V)

WW158B-M06E (5A/250V)

Specification:

Material: Nylon 66 UL94V-2

Current rating:

5A AC,DC Max

Voltage Rating:

300V AC,DC Max

Contact resistance:

15mΩ Max

Insulation resistance:

1000MΩ Min

Withstanding voltage :




1500V AC/Minute

Temperature range:

-25°C to +85°C

Applicable panel thickness:





2 mm max

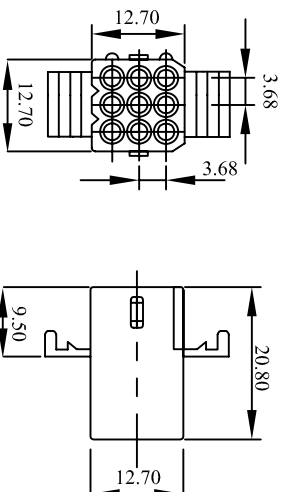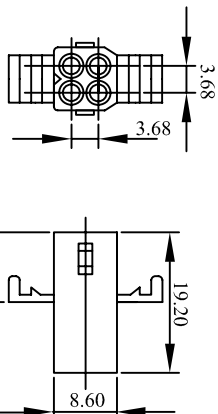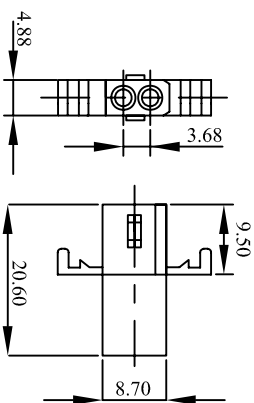

WW158B-M02E (5A/250V)

WW158B-M04-1E (5A/250V)

WW158B-M09E (5A/250V)

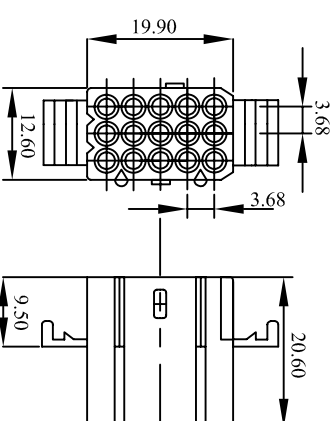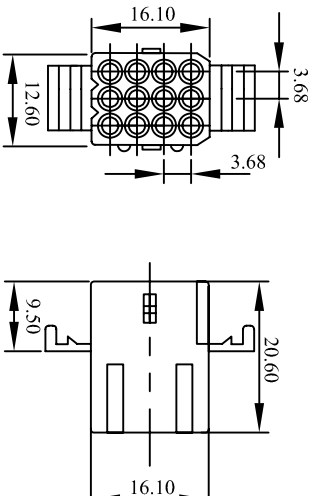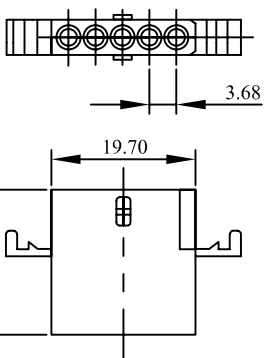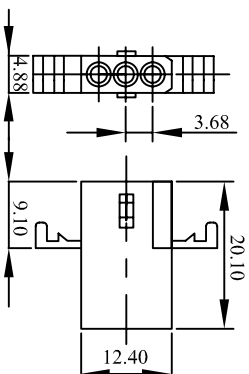

WW158B-M03E (5A/250V)

WW158B-M05E (5A/250V)

WW158B-M12E (5A/250V)

WW158B-M15E (5A/250V)

REV	DESCRIPTION/DATE	DRAWN BY: STORMLI	CUSTOMER:	THIRD ANGLE PROJECTION	UNITS: MM
△		CHECKED BY:SIMMON	PART NO.:	WW158B-M(E) Series	X.XX X.XX X.XXX
△		APPROVED BY: TONY	TITLE:		±0.25 ±0.1 ±0.08
SGS REPORT NO.: KA/2004/80788/A-2				Housing	