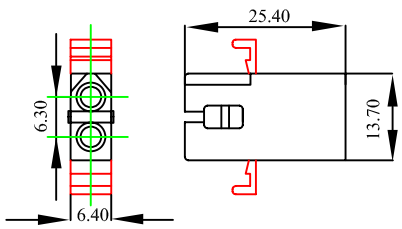

WW236B-M02E(12A/250V)

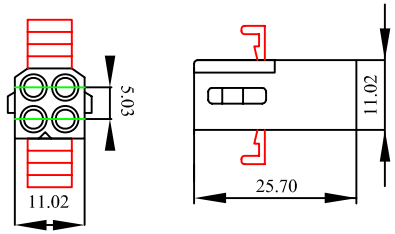

WW236B-M04E(9A/250V)

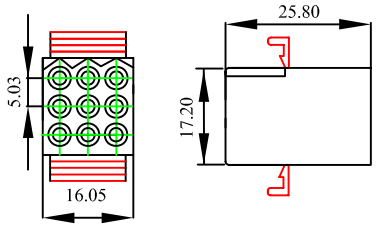

WW236B-M09E(9A/250V)

Material: Nylon 66 UL94V-2
Mate with: WW236B-F Series housing
Current rating:12A AC,DC Max
Voltage Rating:250V AC,DC Max
Contact resistance:15mΩ Max
Insulation resistance:1000MΩ Min
Withstanding voltage :1500V AC/Minute
Temperature range:-25°C to +85°C
Applicable panel thickness: 2.0 mm Max

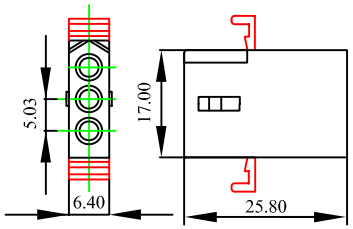

WW236B-M03E(12A/250V)

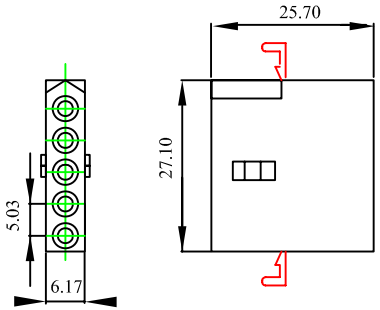

WW236B-M05E(9A/250V)

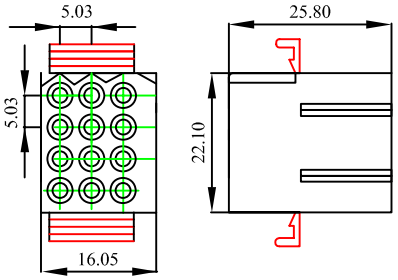

WW236B-M12E(7.5A/250V)

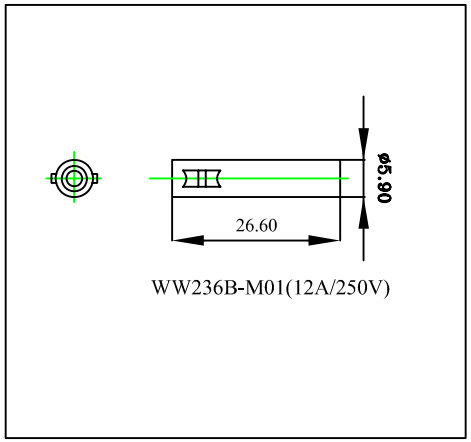

WW236B-M01(12A/250V)



WW236B-M04E(9A/250V)

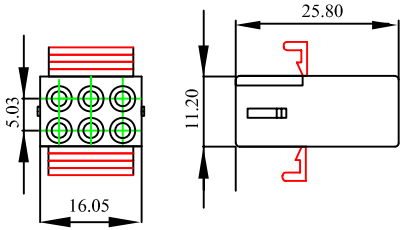

WW236B-M06E(9A/250V)

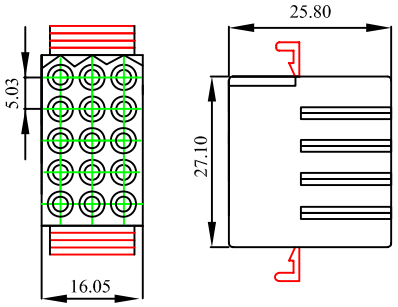

WW236B-M15E(7.5A/250V)

Rev	Descripiton/Date	Drawn By: Storm.li	Customer:		Third angle projection		≤6 ±0.1
△		Checked By:Simmon	Part No.:	WW236B-M(E) Series	General Dimenson Tolerance	Units: mm	≥30 ±0.3
△		Approved By: Tony					6-30 ±0.2
							ANGLE ±3°
SGS Report No. : KA/2004/80788/A-2			Title:	Housing			