


BZX55...

SILICON PLANAR ZENER DIODES

The Zener voltages are graded according to the international E 24 standard. Other tolerances and higher Zener voltages are upon request.

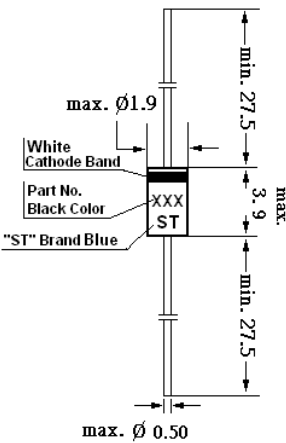


Glass case JEDEC DO-35
Dimensions in mm

Absolute Maximum Ratings (T_a = 25°C)

	Symbol	Value	Unit
Zener Current see Table "Characteristics"			
Power Dissipation	P _{tot}	500 ¹⁾	mW
Junction Temperature	T _j	175	°C
Storage Temperature Range	T _s	-55 to +175	°C
¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case			

Characteristics at T_{amb} = 25°C

	Symbol	Min.	Typ.	Max.	Unit
Thermal Resistance Junction to Ambient Air	R _{thA}	-	-	0.3 ¹⁾	K/mW
Forward Voltage at I _F = 100mA	V _F	-	-	1	V
¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case					



РАДИОТЕХ

Тел.: (495) 795-0805
Факс: (495) 234-1603
Эл. почта: info@rct.ru
Веб: www.rct.ru


BZX55...

Type	Zener Voltage Range ¹⁾			Dynamic Resistance			Reverse Leakage Current			Temp. coefficient of Zener Voltage
	V _{znom} V	I _{ZT} mA	for V _{ZT} ²⁾ V	r _{ZJT} Ω	r _{ZJK} Ω	at I _{ZK} mA	Ta = 25°C μA	Ta = 125°C μA	I _R at V _R V	TKvz %/K
BZX 55/C 0V8 ³⁾	0.8	5	0.73...0.83	<8	<50	1	--	--	--	-0.26...-0.23
BZX 55/C 2V0	2.0	5	1.80...2.15	<85	<600	1	<100	<200	1	-0.09...-0.06
BZX 55/C 2V2	2.2	5	2.08...2.33	<85	<600	1	<75	<160	1	-0.09...-0.06
BZX 55/C 2V4	2.4	5	2.28...2.56	<85	<600	1	<50	<100	1	-0.09...-0.06
BZX 55/C 2V7	2.7	5	2.5...2.9	<85	<600	1	<10	<50	1	-0.09...-0.06
BZX 55/C 3V0	3.0	5	2.8...3.2	<85	<600	1	<4	<40	1	-0.08...-0.05
BZX 55/C 3V3	3.3	5	3.1...3.5	<85	<600	1	<2	<40	1	-0.08...-0.05
BZX 55/C 3V6	3.6	5	3.4...3.8	<85	<600	1	<2	<40	1	-0.08...-0.05
BZX 55/C 3V9	3.9	5	3.7...4.1	<85	<600	1	<2	<40	1	-0.08...-0.05
BZX 55/C 4V3	4.3	5	4.0...4.6	<75	<600	1	<1	<20	1	-0.06...-0.03
BZX 55/C 4V7	4.7	5	4.4...5.0	<60	<600	1	<0.5	<10	1	-0.05...+0.02
BZX 55/C 5V1	5.1	5	4.8...5.4	<35	<550	1	<0.1	<2	1	-0.02...+0.02
BZX 55/C 5V6	5.6	5	5.2...6.0	<25	<450	1	<0.1	<2	1	-0.05...+0.05
BZX 55/C 6V2	6.2	5	5.8...6.6	<10	<200	1	<0.1	<2	2	0.03...0.06
BZX 55/C 6V8	6.8	5	6.4...7.2	<8	<150	1	<0.1	<2	3	0.03...0.07
BZX 55/C 7V5	7.5	5	7.0...7.9	<7	<50	1	<0.1	<2	5	0.03...0.07
BZX 55/C 8V2	8.2	5	7.7...8.7	<7	<50	1	<0.1	<2	6.2	0.03...0.08
BZX 55/C 9V1	9.1	5	8.5...9.6	<10	<50	1	<0.1	<2	6.8	0.03...0.09
BZX 55/C 10	10	5	9.4...10.6	<15	<70	1	<0.1	<2	7.5	0.03...0.1
BZX 55/C 11	11	5	10.4...11.6	<20	<70	1	<0.1	<2	8.2	0.03...0.11
BZX 55/C 12	12	5	11.4...12.7	<20	<90	1	<0.1	<2	9.1	0.03...0.11
BZX 55/C 13	13	5	12.4...14.1	<26	<110	1	<0.1	<2	10	0.03...0.11
BZX 55/C 15	15	5	13.8...15.6	<30	<110	1	<0.1	<2	11	0.03...0.11
BZX 55/C 16	16	5	15.3...17.1	<40	<170	1	<0.1	<2	12	0.03...0.11
BZX 55/C 18	18	5	16.8...19.1	<50	<170	1	<0.1	<2	13	0.03...0.11
BZX 55/C 20	20	5	18.8...21.2	<55	<220	1	<0.1	<2	15	0.03...0.11
BZX 55/C 22	22	5	20.8...23.3	<55	<220	1	<0.1	<2	16	0.04...0.12
BZX 55/C 24	24	5	22.8...25.6	<80	<220	1	<0.1	<2	18	0.04...0.12
BZX 55/C 27	27	5	25.1...28.9	<80	<220	1	<0.1	<2	20	0.04...0.12
BZX 55/C 30	30	5	28...32	<80	<220	1	<0.1	<2	22	0.04...0.12
BZX 55/C 33	33	5	31...35	<80	<220	1	<0.1	<2	24	0.04...0.12
BZX 55/C 36	36	5	34...38	<80	<220	1	<0.1	<2	27	0.04...0.12
BZX 55/C 39	39	2.5	37...41	<90	<500	0.5	<0.1	<5	30	0.04...0.12
BZX 55/C 43	43	2.5	40...46	<90	<500	0.5	<0.1	<5	33	0.04...0.12
BZX 55/C 47	47	2.5	44...50	<110	<600	0.5	<0.1	<5	36	0.04...0.12
BZX 55/C 51	51	2.5	48...54	<125	<700	0.5	<0.1	<10	39	0.04...0.12
BZX 55/C 56	56	2.5	52...60	<135	<700	0.5	<0.1	<10	43	0.04...0.12
BZX 55/C 62	62	2.5	58...66	<150	<1000	0.5	<0.1	<10	47	0.04...0.12
BZX 55/C 68	68	2.5	64...72	<200	<1000	0.5	<0.1	<10	51	0.04...0.12
BZX 55/C 75	75	2.5	70...79	<250	<1000	0.5	<0.1	<10	56	0.04...0.12
BZX 55/C 82	82	2.5	77...87	<300	<1500	0.25	<0.1	<10	62	0.05...0.12
BZX 55/C 91	91	1	85...96	<450	<2000	0.1	<0.1	<10	68	0.05...0.12
BZX 55/C 100	100	1	94...106	<450	<5000	0.1	<0.1	<10	75	0.05...0.12
BZX 55/C 110	110	1	104...116	<600	<5000	0.1	<0.1	<10	82	0.05...0.12
BZX 55/C 120	120	1	114...127	<800	<5500	0.1	<0.1	<10	91	0.05...0.12
BZX 55/C 130	130	1	124...141	<950	<6000	0.1	<0.1	<10	100	0.05...0.12
BZX 55/C 150	150	1	138...156	<1250	<6500	0.1	<0.1	<10	110	0.05...0.12
BZX 55/C 160	160	1	153...171	<1400	<7000	0.1	<0.1	<10	120	0.05...0.12
BZX 55/C 180	180	1	168...191	<1700	<8500	0.1	<0.1	<10	130	0.05...0.12
BZX 55/C 200	200	1	188...212	<2000	<10000	0.1	<0.1	<10	150	0.05...0.12

1) Tested with pulses t_p = 20 ms.


2) Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case

3) The BZX55-C0V8 is a silicon diode with operation in forward direction. Hence, the index of all parameters should be "F" instead of "Z". Connect the cathode lead to the negative pole.




SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)





Dated : 22/07/2005

Breakdown characteristics
Tj= constant (pulsed)

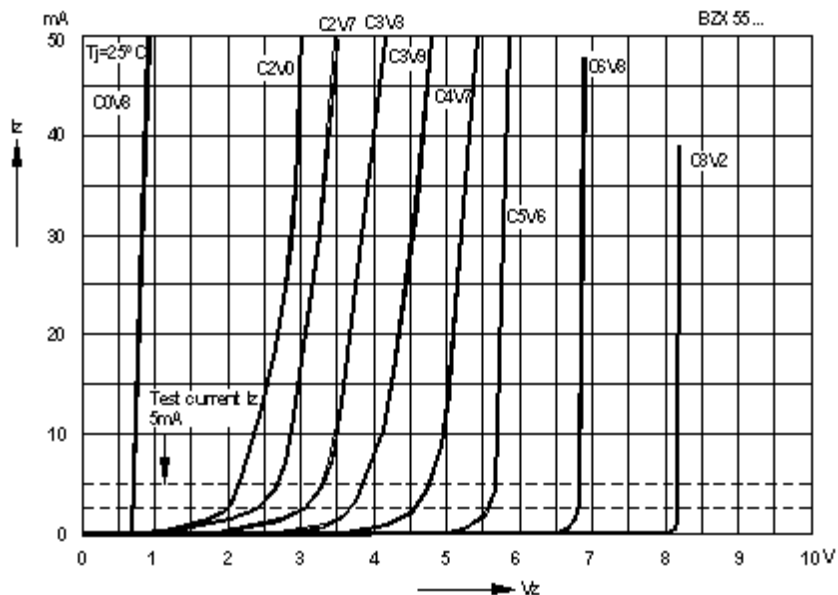

Breakdown characteristics
Tj= constant (pulsed)

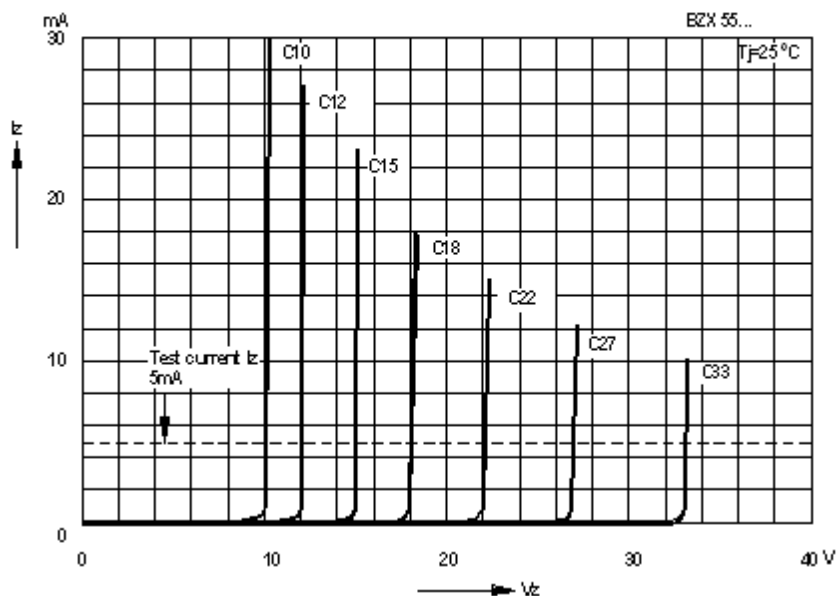

SEMTECH ELECTRONICS LTD.
(Subsidiary of Semtech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)

