

# 1N4148WT

## SURFACE MOUNT FAST SWITCHING DIODE

### Features


- Fast Switching Speed.
- Ultra-Small Surface Mount Package.
- For General Purpose Switching Applications
- High Conductance

### Mechanical Data

- Case: SOD-523, Plastic
- Moisture Sensitivity : Level 1 per J-STD-020A
- Polarity : Cathode Band
- Terminals: Finish – Matte Tin  
Solderable per MIL-STD-202, Method 208


### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

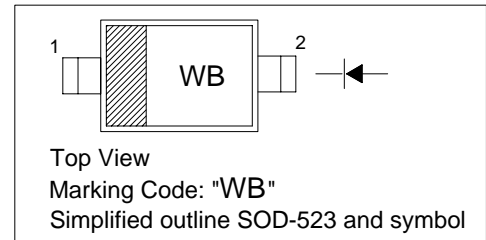

### Absolute Maximum Ratings (T<sub>j</sub> = 25° )

Parameter	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V <sub>RM</sub>	100	V
Reverse Voltage	V <sub>R</sub>	75	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	53	V
Forward Continuous Current	I <sub>FM</sub>	250	mA
Average Rectified Output Current	I <sub>O</sub>	125	mA
Non-Repetitive Peak Forward Surge Current @ t=1.0μs	I <sub>FSM</sub>	2.0	A
@ t=100ns		1.0	
Power Dissipation	P <sub>tot</sub>	150	mW
Thermal Resistance Junction to Ambient Air	R <sub>θJA</sub>	833	? /W
Operating Temperature Range	T <sub>J</sub>	-65 to +150	?
Storage Temperature	T <sub>s</sub>	-65 to +150	?



®

**РАДИОТЕХ**


Тел.: (495) 795-0805  
Факс: (495) 234-1603  
Эл. почта: info@rct.ru  
Веб: www.rct.ru

# 1N4148WT

## Characteristics at $T_j = 25\text{ }^\circ\text{C}$


Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
Reverse Breakdown Voltage <sup>1)</sup>	$I_R = 1.0\mu\text{A}$	$V_{(BR)R}$	75	-	-	V
Forward Voltage	$I_F = 1.0\text{mA}$	$V_F$	-	-	0.715	V
	$I_F = 10\text{mA}$		-	-	0.855	
	$I_F = 50\text{mA}$		-	-	1.0	
	$I_F = 150\text{mA}$		-	-	1.25	
Peak Reverse Current <sup>1)</sup>	$V_R = 75\text{V}$	$I_R$	-	-	1.0	$\mu\text{A}$
	$V_R = 75\text{V}, T_J = 150\text{ }^\circ\text{C}$		-	-	50	$\mu\text{A}$
	$V_R = 25\text{V}, T_J = 150\text{ }^\circ\text{C}$		-	-	30	$\mu\text{A}$
	$V_R = 20\text{V}$		-	-	25	nA
Total Capacitance	$V_R = 0\text{V}, f = 1\text{MHz}$	$C_T$	-	-	2.0	pF
Reverse Recovery Time	$I_{rr} = 0.1 \times I_R, I_F = I_R = 10\text{mA}, R_L = 100\ \Omega$	$t_{rr}$	-	-	4.0	ns

1) Short duration pulse test used to minimize self-heating effect.



## SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)




Dated : 11/10/2004

# 1N4148WT


## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-523

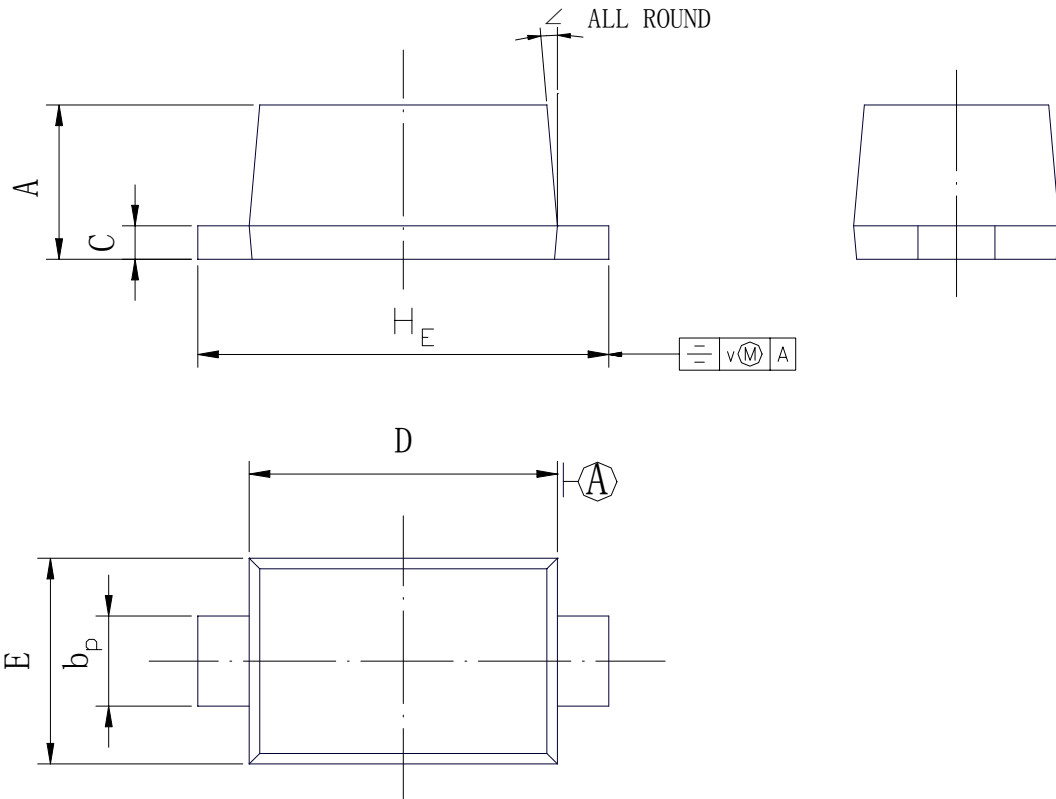


UNIT	A	b <sub>P</sub>	C	D	E	H <sub>E</sub>	v	∠
mm	0.70 0.60	0.4 0.3	0.135 0.127	1.25 1.15	0.85 0.75	1.65 1.55	0.1	5°



**SEMTECH ELECTRONICS LTD.**

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002  
Certificate No. 05103



ISO 14001  
Certificate No. 7116



ISO 9001 : 2000  
Certificate No. 555-105-042-24

Dated : 11/10/2004