

1SV306C-WT


VHF TUNER VARIABLE CAPACITANCE DIODE

FEATURES

- High capacitance ratio ($n = 11$ min)
- Low series resistance and good C-V linearity
- Ultra small Flat Package (UFP) is suitable for surface mount design

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

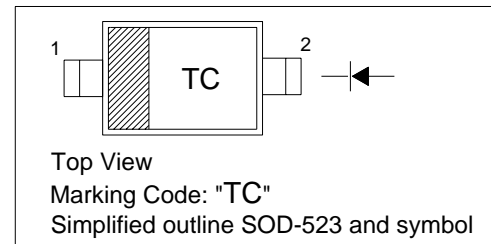


Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	34	V
Operating Junction Temperature Range	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Min.	Max.	Unit
Reverse Current at $V_R = 32\text{ V}$ at $V_R = 32\text{ V}$, $T_j = 60\text{ }^\circ\text{C}$	I_R	- -	10 100	nA
Diode Capacitance at $V_R = 2\text{ V}$, $f = 1\text{ MHz}$ at $V_R = 25\text{ V}$, $f = 1\text{ MHz}$	C_d	29.5 2.57	34 2.9	pF
Capacitance Ratio	$C_{d(2V)}/C_{d(25V)}$	11	-	-
Matching Error at $V_R = 2\text{ V}$ to 25 V , $f = 1\text{ MHz}$	$\Delta C_d/C_d$	-	2	%
Series Resistance at $f = 470\text{ MHz}$, $V_R = 5\text{ V}$	r_s	-	0.75	Ω



®

РАДИОТЕХ-ТРЕЙД

Тел.: (495) 795-0805
Факс: (495) 234-1603
Эл. почта: info@rct.ru
Веб: www.rct.ru

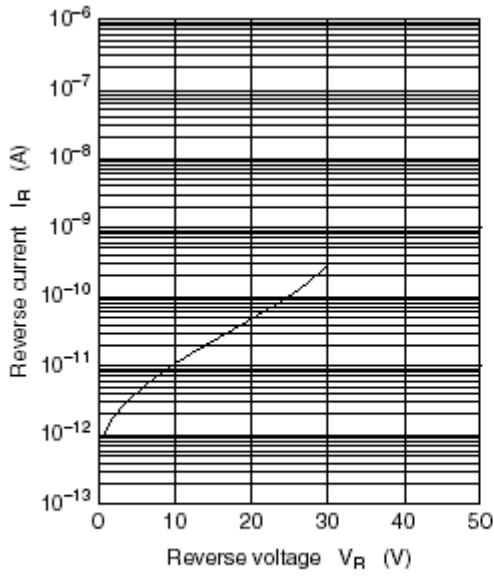


Fig.1 Reverse current vs. Reverse voltage

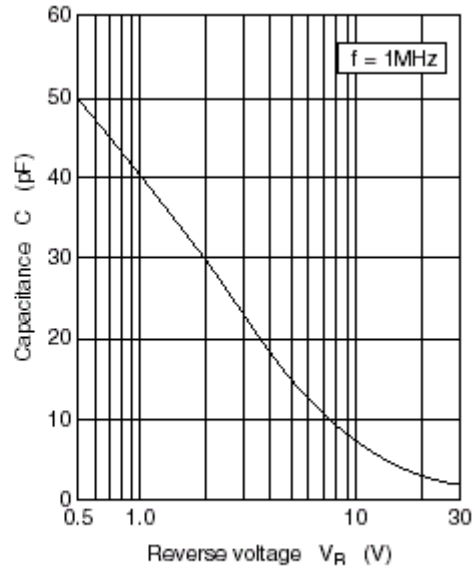


Fig.2 Capacitance vs. Reverse voltage

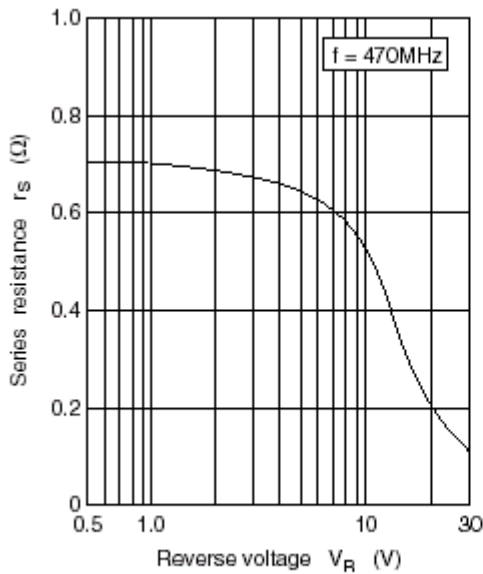


Fig.3 Series resistance vs. Reverse voltage


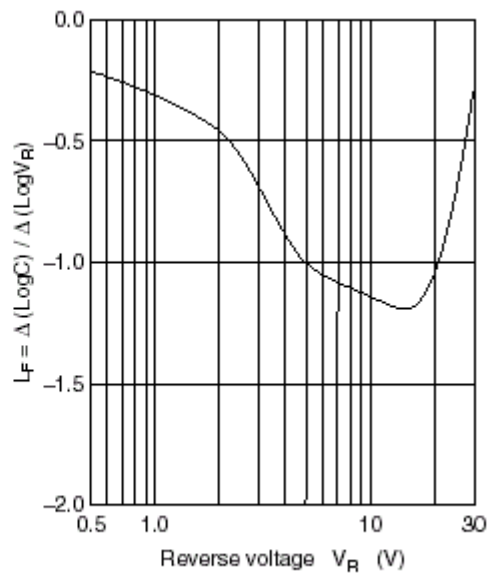


Fig.4 Linearity factor vs. Reverse voltage



®

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001:2004
Certificate No. 7116



ISO 9001:2000
Certificate No. 0506098



Dated : 03/05/2006

1SV306C-WT

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-523

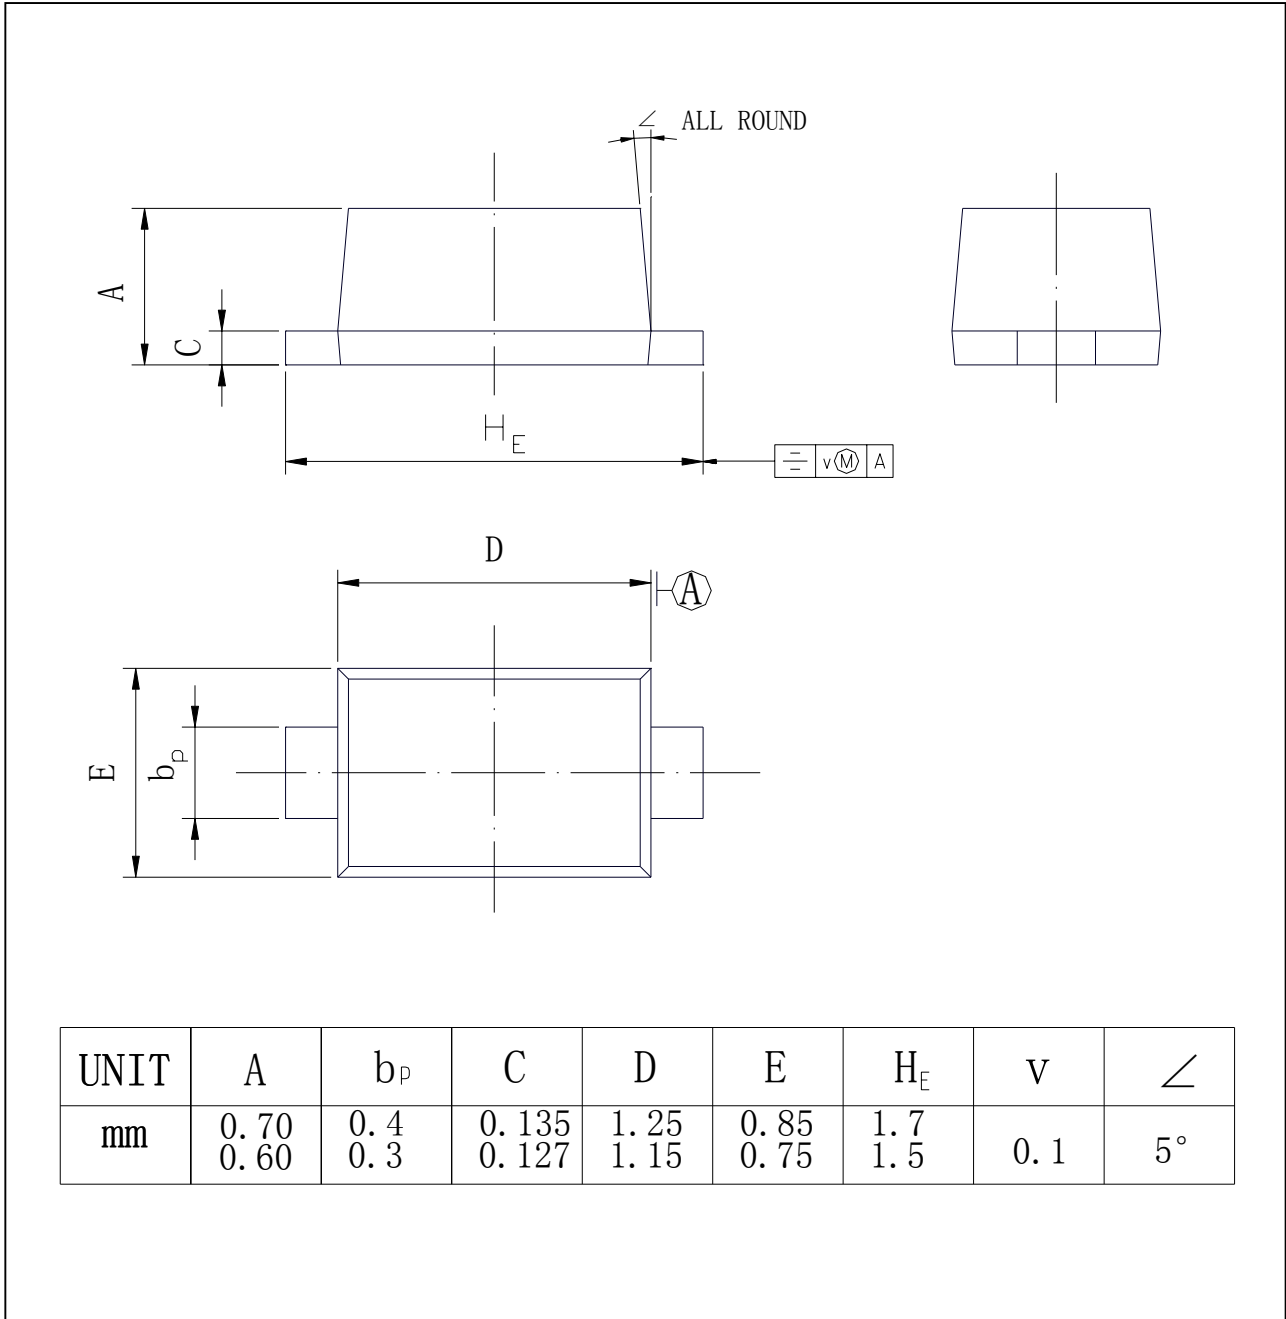

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)

®



Dated : 03/05/2006