


# HC Series

## SILICON PLANAR ZENER DIODES

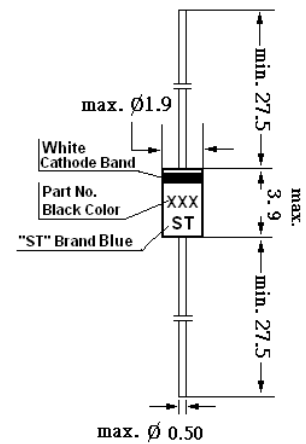

Glass case JEDEC DO-35

Dimensions in mm

### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )


	Symbol	Value	Unit
Zener Current see Table "Characteristics"			
Power Dissipation	$P_{\text{tot}}$	500 <sup>1)</sup>	mW
Junction Temperature	$T_j$	175	$^\circ\text{C}$
Storage Temperature Range	$T_s$	-65 to +175	$^\circ\text{C}$

<sup>1)</sup> Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.

### Characteristics at $T_j = 25^\circ\text{C}$

	Symbol	Min.	Typ.	Max.	Unit
Thermal Resistance Junction to Ambient Air	$R_{\text{thA}}$	-	-	0.3 <sup>1)</sup>	K/mW

<sup>1)</sup> Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.



®

**РАДИОТЕХ**

Тел.: (495) 795-0805  
 Факс: (495) 234-1603  
 Эл. почта: info@rct.ru  
 Веб: www.rct.ru


# HC Series

## Characteristics at $T_j = 25^\circ\text{C}$

TYPE	Zener Voltage		$I_{ZT}$ (mA)	Dynamic Resistance		Reverse Leakage Current ( $I_R$ at $V_R$ )	
	Min. (V)	Max. (V)		Ohm at $I_{ZT}$	$I_{ZT}$ (mA)	$I_R$ ( $\mu\text{A}$ ) Max.	$V_R$ (V)
2.2HC	2.09	2.41	20	120	20	120	0.7
2.2HCA	2.12	2.30					
2.2HCB	2.22	2.41					
2.4HC	2.30	2.64	20	120	20	120	1
2.4HCA	2.33	2.52					
2.4HCB	2.43	2.63					
2.7HC	2.50	2.90	20	100	20	100	1
2.7HCA	2.54	2.75					
2.7HCB	2.69	2.91					
3.0HC	2.80	3.20	20	80	20	50	1
3.0HCA	2.85	3.07					
3.0HCB	3.01	3.22					
3.3HC	3.10	3.50	20	70	20	20	1
3.3HCA	3.16	3.38					
3.3HCB	3.32	3.53					
3.6HC	3.40	3.80	20	60	20	10	1
3.6HCA	3.47	3.68					
3.6HCB	3.62	3.83					
3.9HC	3.70	4.10	20	50	20	5	1
3.9HCA	3.77	3.98					
3.9HCB	3.92	4.14					
4.3HC	4.00	4.50	20	40	20	5	1
4.3HCA	4.05	4.26					
4.3HCB	4.20	4.40					
4.3HCC	4.34	4.53					
4.7HC	4.40	4.90	20	25	20	5	1
4.7HCA	4.47	4.65					
4.7HCB	4.59	4.77					
4.7HCC	4.71	4.91					
5.1HC	4.80	5.40	20	20	20	5	1.5
5.1HCA	4.85	5.03					
5.1HCB	4.97	5.18					
5.1HCC	5.12	5.35					


<sup>1)</sup> Tested with pulse  $t_p = 20\text{ms}$

<sup>2)</sup> Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature.



**SEMTECH ELECTRONICS LTD.**

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 22/07/2005


# HC Series

## Characteristics at $T_j = 25^\circ\text{C}$

TYPE	Zener Voltage			Dynamic Resistance		Reverse Leakage Current ( $I_R$ at $V_R$ )	
	Min. (V)	Max. (V)	$I_{ZT}$ (mA)	Ohm at $I_{ZT}$	$I_{ZT}$ (mA)	$I_R$ ( $\mu\text{A}$ ) Max.	$V_R$ (V)
5.6HC	5.30	6.00	20	13	20	5	2.5
5.6HCA	5.29	5.52					
5.6HCB	5.46	5.70					
5.6HCC	5.64	5.88					
6.2HC	5.80	6.60	20	10	20	5	3
6.2HCA	5.81	6.06					
6.2HCB	5.99	6.24					
6.2HCC	6.16	6.40					
6.8HC	6.40	7.20	20	8	20	2	3.5
6.8HCA	6.32	6.59					
6.8HCB	6.52	6.79					
6.8HCC	6.70	6.97					
7.5HC	7.00	7.90	20	8	20	0.5	4
7.5HCA	6.88	7.19					
7.5HCB	7.11	7.41					
7.5HCC	7.33	7.64					
8.2HC	7.70	8.70	20	8	20	0.5	5
8.2HCA	7.56	7.90					
8.2HCB	7.82	8.15					
8.2HCC	8.07	8.41					
9.1HC	8.50	9.60	20	8	20	0.5	6
9.1HCA	8.33	8.70					
9.1HCB	8.61	8.99					
9.1HCC	8.89	9.29					
10HC	9.40	10.90	20	8	20	0.2	7
10HCA	9.19	9.59					
10HCB	9.48	9.90					
10HCC	9.82	10.30					

1) Tested with pulse  $t_p = 20\text{ms}$

2) Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature.



®

## SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002  
Certificate No. 05103



ISO 14001  
Certificate No. 7116



ISO 9001 : 2000  
Certificate No. 558-1986-AL-R02-004

Dated : 22/07/2005


# HC Series

## Characteristics at $T_j = 25^\circ\text{C}$

TYPE	Zener Voltage			Dynamic Resistance		Reverse Leakage Current ( $I_R$ at $V_R$ )	
	Min. (V)	Max. (V)	$I_{ZT}$ (mA)	Ohm at $I_{ZT}$	$I_{ZT}$ (mA)	$I_R$ ( $\mu\text{A}$ ) Max.	$V_R$ (V)
11HC	10.40	11.60	10	10	10	0.2	8
11HCA	10.18	10.63					
11HCB	10.50	10.95					
11HCC	10.82	11.26					
12HC	11.40	12.60	10	12	10	0.2	9
12HCA	11.13	11.63					
12HCB	11.50	11.92					
12HCC	11.80	12.30					
13HC	12.40	14.10	10	14	10	0.2	10
13HCA	12.18	12.71					
13HCB	12.59	13.16					
13HCC	13.03	13.62					
15HC	13.80	15.60	10	16	10	0.2	11
15HCA	13.48	14.09					
15HCB	13.95	14.56					
15HCC	14.42	15.52					
16HC	15.30	17.10	10	18	10	0.2	12
16HCA	14.87	15.50					
16HCB	15.33	15.96					
16HCC	15.79	16.50					
18HC	16.80	19.10	10	23	10	0.2	13
18HCA	16.34	17.06					
18HCB	16.90	17.67					
18HCC	17.51	18.30					
20HC	18.80	21.60	10	28	10	0.2	15
20HCA	18.11	18.92					
20HCB	18.73	19.57					
20HCC	19.38	20.22					
20HCD	19.88	20.72					
22HC	20.80	23.30	5	30	5	0.2	17
22HCA	20.23	21.08					
22HCB	20.76	21.65					
22HCC	21.22	22.09					
22HCD	21.68	22.61					
24HC	21.80	25.60	5	35	5	0.2	19
24HCA	22.26	23.12					
24HCB	22.75	23.73					
24HCC	23.29	24.27					
24HCD	23.81	24.81					

1) Tested with pulse  $t_p = 20\text{ms}$


2) Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature.



®

## SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 22/07/2005


# HC Series

## Characteristics at $T_j = 25^\circ\text{C}$

TYPE	Zener Voltage			Dynamic Resistance		Reverse Leakage Current ( $I_R$ at $V_R$ )	
	Min. (V)	Max. (V)	$I_{ZT}$ (mA)	Ohm at $I_{ZT}$	$I_{ZT}$ (mA)	$I_R$ ( $\mu\text{A}$ ) Max.	$V_R$ (V)
27HC	25.10	28.90	5	45	5	0.2	21
27HCA	24.26	25.52					
27HCB	24.97	26.26					
27HCC	25.63	26.95					
27HCD	26.29	27.64					
30HC	28.00	32.00	5	55	5	0.2	23
30HCA	26.99	28.39					
30HCB	27.70	29.13					
30HCC	28.36	29.82					
30HCD	29.02	30.51					
33HC	31.00	35.00	5	65	5	0.2	25
33HCA	29.68	31.22					
33HCB	30.32	31.88					
33HCC	30.90	32.50					
33HCD	31.49	33.11					

1) Tested with pulse  $t_p = 20\text{ms}$

2) Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature.



®

## SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002  
Certificate No. 05103



ISO 14001  
Certificate No. 7116



ISO 9001 : 2000  
Certificate No. 559-199-02-R0C-004

Dated : 22/07/2005