


LLDB-3, LLDB-4

SILICON BIDIRECTIONAL DIACS

The glass passivated, three-layer, two terminal, axial lead, hermetically sealed diacs are designed specifically for triggering thyristors. They demonstrate low breakover current at breakover voltage as they withstand peak pulse current. The breakover symmetry is within four volts with a typical breakover voltage of LLDB-3 32 volts, LLDB-4 40 volts. These diacs are intended for use in thyristor phase control, circuits for lamp-dimming, universal-motor speed controls, and heat controls.

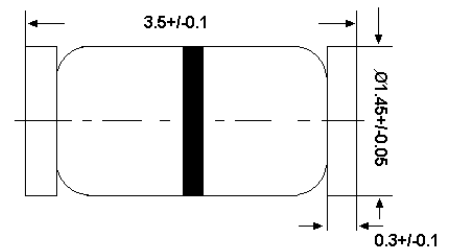

Glass case MiniMELF

Dimensions in mm

Semtech's LLDB-3 and LLDB-4 are bi-directional trigger diodes designed to operate in conjunction with all of Semtech Electronics' Triacs and SCR's

Storage Temperature T_{STG} - 40°C to +150°C

Operating Temperature T_J - 40°C to +100°C

MAXIMUM RATINGS AT 50°C Ambient


Peak Current (10µ sec duration, 120 cycle repetition rate) I_P ±2 Amperes Max.

Peak output voltage e_P 3 ±volts Max*.

Characteristics at $T_{amb} = 25^\circ C$

Test	Symbol	Min.	Typ.	Max.	Unit
Breakover Voltage	DB-3	28	32	36	Volts
	DB-4	35	40	45	
Breakover Currents	$I_{(BR)1}$ and $I_{(BR)2}$	-	-	200	µamp
Breakover Voltage Symmetry	$[V_{(BR)1}] - [V_{(BR)2}]$	-	-	3.8	Volts
Dynamic Breakover Voltage $\Delta I = [I_{BR} \text{ to } I_F = 10mA]$	$I \Delta V \pm I$	5	-	-	Volts
Thermal Impedance Junction To Ambient	$R_{\theta JA}$	-	-	60	°C/W



*CIRCUIT FOR PEAK OUTPUT VOLTAGE TEST

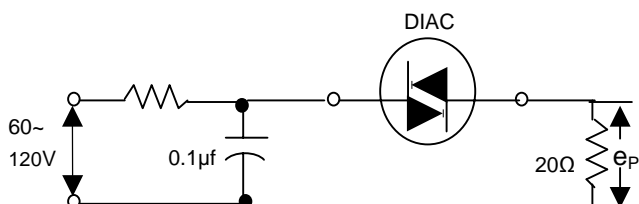

Characteristics at $T_{amb} = 25^\circ C$

TYPICAL DIAC-TRIAC

FULL-WAVE PHASE CONTROL CIRCUIT

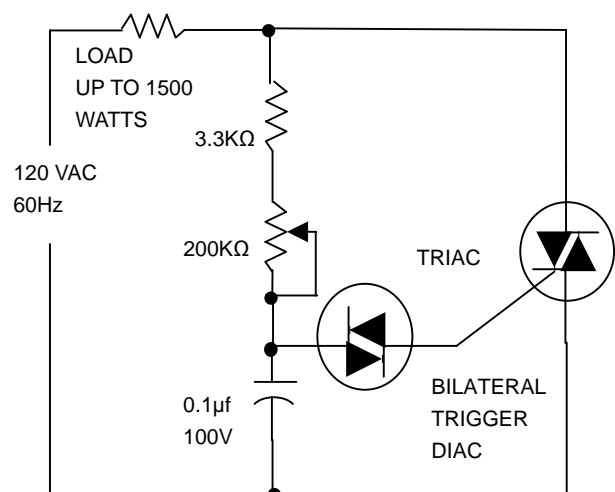

®

РАДИОТЕХ

Тел.: (495) 795-0805
Факс: (495) 234-1603
Эл. почта: info@rct.ru
Веб: www.rct.ru