

NVF28



22.5×15×25.0

Features
<ul style="list-style-type: none"> 40A continuous rating at 85°C. 2.8mm quick connect terminals. Contact arrangement form A and C available. Suitable for automobile fuel pump, A/C compressor clutch, horn and lighting system etc.

Ordering Information	
NVF28	A 40 DC6V 1.3 C R
1	2 3 4 5 6 7
1 Part number: NVF28	4 Coil rated voltage(V): DC:6,12,24
2 Contact arrangement: A:1A; C:1C	5 Coil power consumption: 0.9:0.9W; 1.3:1.3W
3 Contact Current: 20:20A;25:25A; 35:35A;40A:40A	6 Contact material: NIL: AgSnO ₂ ; C:AgCdO
	7 Coil transient suppression: NIL: Standard; R:with resistance; D:with diode

Contact Data	
Contact Arrangement	1A (1H) (SPSTNO) 1C (1Z) (SPDT(B-M))
Contact material	AgSnO ₂ AgCdO
Contact Rating (resistive)	25A,35A,40A/14VDC; 20A/27VDC
Max. Switching Power	560W
Max. Switching voltage	75VDC
Max. Switching Current	40A
Max. Continuous Current	NO:35A, NC:25A
Contact Voltage drop	100mΩ (1A 6VDC) Item 4.12 of IEC 61810-7 ≤250mV(10A) example:50mV
Operation life	Electrical 1×10 ⁵ Item 4.30 of IEC 61810-7
	Mechanical 1×10 ⁷ Item 4.31 of IEC 61810-7


Coil Parameter								
Dash numbers	Coil voltage VDC		Coil resistance Ω ±10%	Pick up voltage VDC(max) (60% of rated voltage)	Release voltage VDC(min) (10% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
006-090	6	7.8	40	3.6	0.6	0.9	≤5	≤2
012-090	12	15.6	160	7.2	1.2			
024-090	24	31.2	640	14.4	2.4			
006-130	6	7.8	27	3.6	0.6	1.3	≤5	≤2
012-130	12	15.6	109	7.2	1.2			
024-130	24	31.2	436	14.4	2.4			

CAUTION: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

Operation condition


Insulation Resistance	100MΩ min. (500VDC)	Item 7 of IEC 60255-5
Dielectric Strength	50Hz 500V	Item 6 of IEC 60255-5
Between contacts	50Hz 500V	Item 6 of IEC 60255-5
Between contact and coil		
Shock Resistance	200m/s ² 11ms	IEC 68-2-27 test Ea
Vibration Resistance	10~40Hz double amplitude 1.27mm	IEC 68-2-6 test Fc
	40~70Hz 49m/s ²	
	70~100Hz double amplitude 0.5mm	
100~500Hz 98m/s ²		
Terminals strength	10N	IEC 68-2-21 test Ua 1
Ambient Temperature	-40~125°C	
Relative Humidity	85% (20°C)	IEC 68-2-3 test Ca
Mass	21g	

Dimensions

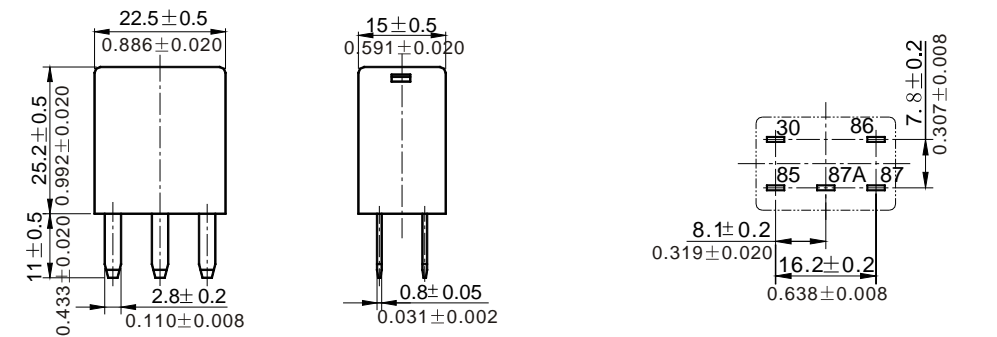

Dimensions

Mounting (Bottom view)

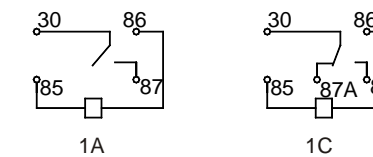

Wiring diagram (Bottom view)

NOTES 1).Dimensions are in millimeters.
2).Inch equivalents are given for general information only.