


# ST-101E




## Specification

|                   |                       |
|-------------------|-----------------------|
| Model             | ST-101E               |
| Rated current     | 5A, 7A, 10A, 13A, 16A |
| Operating voltage | 12V-250V              |

## Dimension

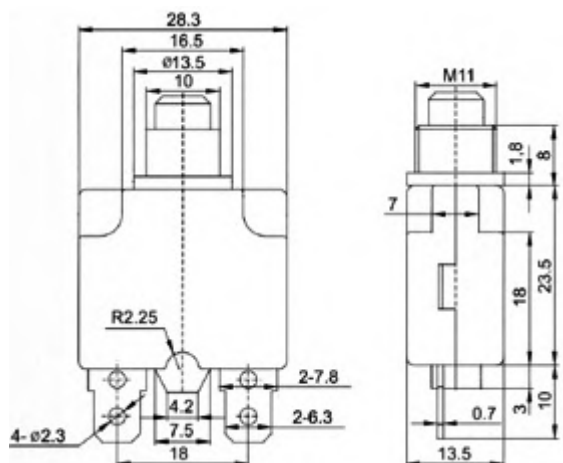

## Tripping curve

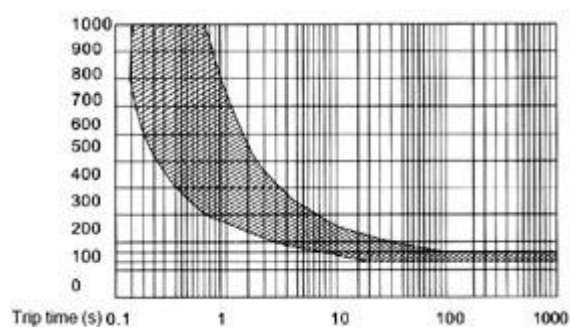

## Tripping standards

| Overload percentage | Trip time | Overload percentage | Trip time |
|---------------------|-----------|---------------------|-----------|
| 100%                | No trip   | 500%                | 0.3-2.8s  |
| 150%                | In 1 hour | 600%                | 0.25-2s   |
| 200%                | 3.0-12s   | 800%                | 0.2-1s    |
| 300%                | 0.8-8s    | 1000%               | 0.15-0.8s |
| 400%                | 0.35-5s   |                     |           |